

SISO HINGES



- high quality furniture fittings



The technical descriptions and dimensions in this catalogue, also those with the photographs and drawings, are not binding. We reserve the right to make design improvements.

We bear no liability for any misprints or other errors that might occur in the production of the catalogue.

SISO A/S tager forbehold for trykfejl samt ændringer i produktets specifikationer.

Für Druckfehler und Irrtümer ist jede Haftung ausgeschlossen. Produktänderungen behalten wir uns vor.




- high quality furniture fittings

SISO A/S
MILEPARKEN 11
DK - 2740 SKOVLUNDE
(COPENHAGEN)
DENMARK
PHONE: (+45) 45 830 900
FAX: (+45) 45 830 444

DISTRIBUTOR

Cabinet hinges for wood

Cup hinge - 2-way	4-13
Cup hinge - soft close	14-17
Door dampers	18-19
PTO (push to open) & touch latches	20-22
Cabinet hinge 135 degree	23
Hinges with visible axle	23-25
Butt & Flap hinges	26-29
Flush & pin hinges	30



Self closing door hinges in SS-304



31

Cabinet hinges for alu frames

Hinges - soft close



32-33

Cabinet hinges for glass

Cup hinges - 2-way	34-35
Cup hinges - soft close	36-39
Hinges for drilling	40-42
Hinges for "no drilling"	43-46
Hinges for uv-glue	47-50




Small Box Fittings

Small Box Hinges	51
Small Box Clasps, Locks & Magnets	52



Table hinges

Concealed hinges	53-57
Butler's tray hinges	57



Caravan hinges





58

Door hinges (HEAVY DUTY)






59-63

MINI HINGE Ø 26 MM -98°

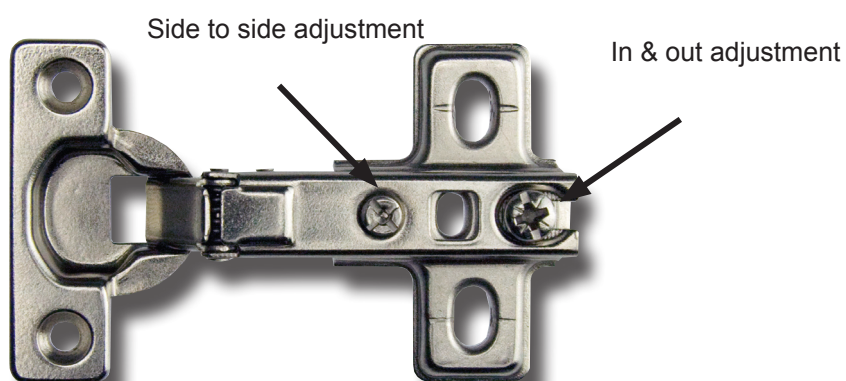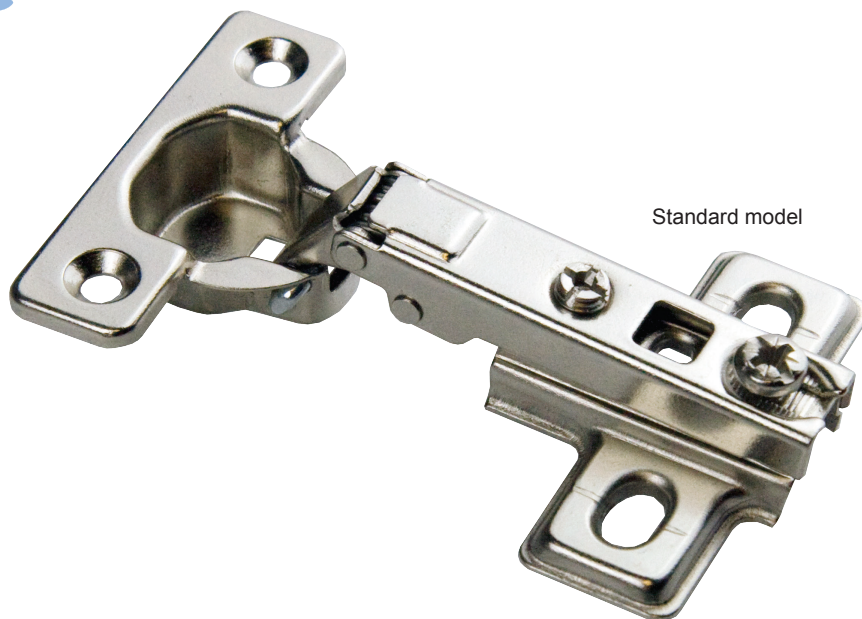

**2-WAY
SLIDE-ON
FI 12-22 MM PANEL
Ø26 MM CUP**

H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel

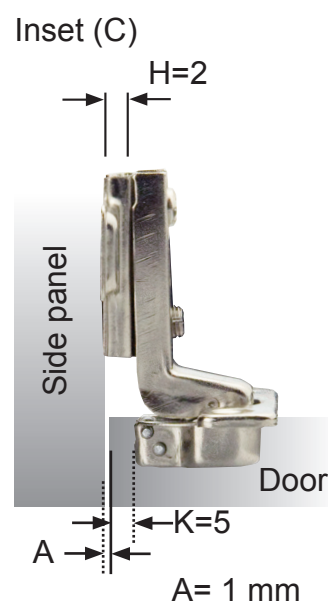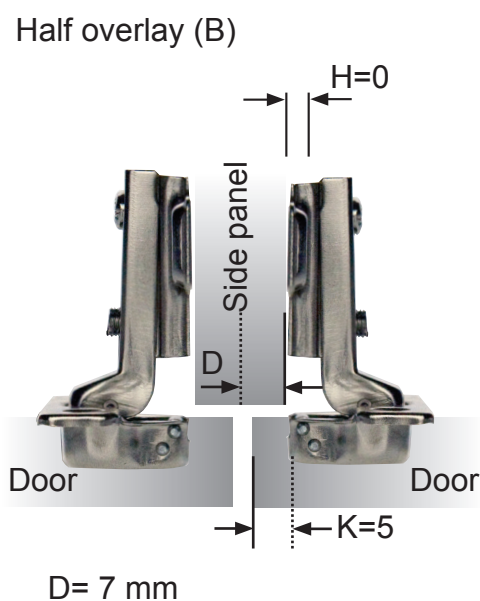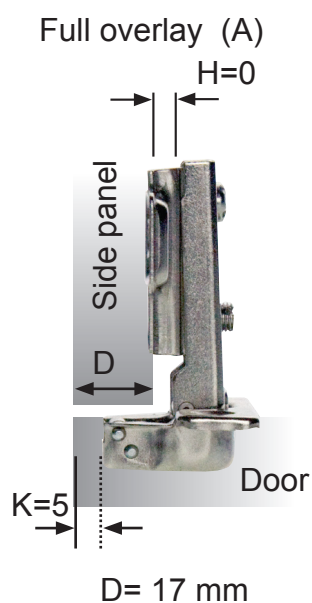


MINI HINGE Ø 26 MM -98°

- high quality furniture fittings

SISO DENMARK


Cup drawing




Opening angle: 98°
 Depth of hinge cup: 9,5 mm
 Diameter of hinge cup: 26 mm
 Mounting of hinge: Screw on: c.c.38 mm
 Possible drilling distances on the door (K): 3-6 mm
 Door thickness: 12-22 mm

Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																				
Full overlay (A)		15.02.640 Incl. mounting plate H = 0 SISO logo in cup	<table border="1"> <tr> <th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th></tr> <tr> <th>0</th><td>15</td><td>16</td><td>17</td><td>18</td></tr> <tr> <th>2</th><td>13</td><td>14</td><td>15</td><td>16</td></tr> <tr> <th>4</th><td>11</td><td>12</td><td>13</td><td>14</td></tr> </table>	D \ K	3	4	5	6	0	15	16	17	18	2	13	14	15	16	4	11	12	13	14	
D \ K	3	4	5	6																				
0	15	16	17	18																				
2	13	14	15	16																				
4	11	12	13	14																				
Half overlay (B)		15.02.641 Incl. mounting plate H = 0 SISO logo in cup	<table border="1"> <tr> <th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th></tr> <tr> <th>0</th><td>5</td><td>6</td><td>7</td><td>8</td></tr> <tr> <th>2</th><td>3</td><td>4</td><td>5</td><td>6</td></tr> <tr> <th>4</th><td>1</td><td>2</td><td>3</td><td>4</td></tr> </table>	D \ K	3	4	5	6	0	5	6	7	8	2	3	4	5	6	4	1	2	3	4	
D \ K	3	4	5	6																				
0	5	6	7	8																				
2	3	4	5	6																				
4	1	2	3	4																				
Inset (C)		15.02.642 Incl. mounting plate H = 2 SISO logo in cup	<table border="1"> <tr> <th>A \ K</th><th>3</th><th>4</th><th>5</th><th>6</th></tr> <tr> <th>0</th><td>1</td><td>0</td><td>-1</td><td>-2</td></tr> <tr> <th>2</th><td>3</td><td>2</td><td>1</td><td>0</td></tr> <tr> <th>4</th><td>1</td><td>2</td><td>3</td><td>4</td></tr> </table>	A \ K	3	4	5	6	0	1	0	-1	-2	2	3	2	1	0	4	1	2	3	4	
A \ K	3	4	5	6																				
0	1	0	-1	-2																				
2	3	2	1	0																				
4	1	2	3	4																				
		H = 0/2 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																					
		15.03.726 H = 2 f/euro screws Clip-on	To be ordered separately if euro screw mounting is wanted. Pre-mounted euro screws included.																					

MAXI HINGE Ø35 MM - 110° - 2-WAY

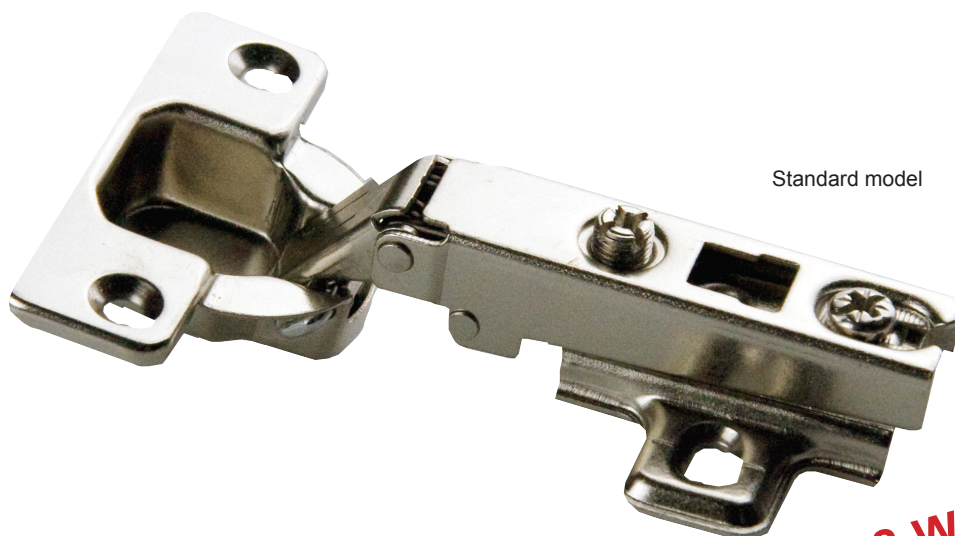


2-WAY
Slide-on
FI 14-24 MM PANEL
Ø35 MM CUP

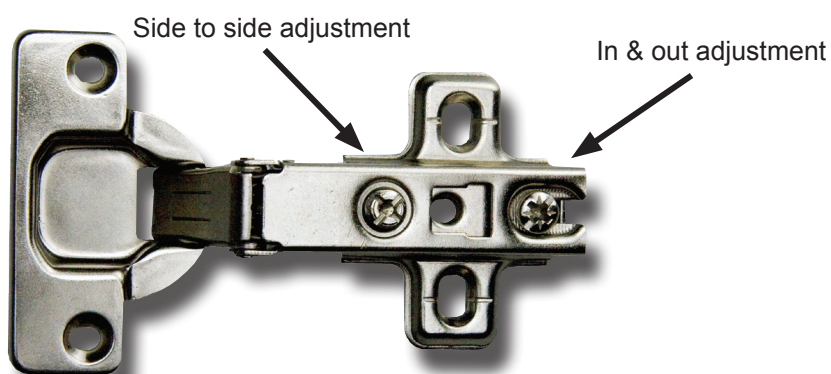


H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel

Full overlay (A)

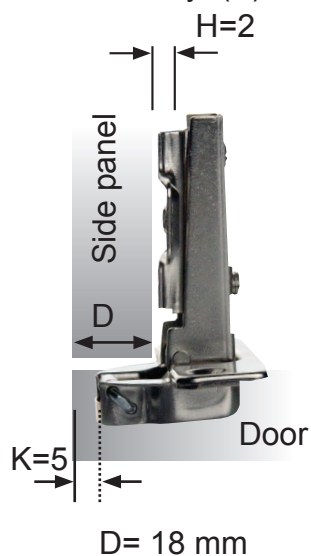

Half overlay (B)

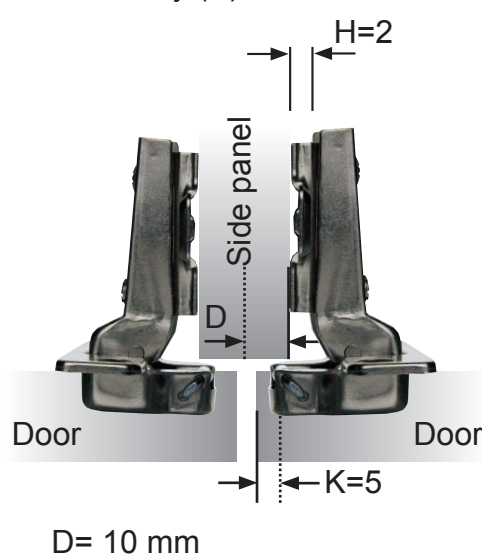

Inset (C)




MAXI HINGE Ø35 MM - 110° - 2-WAY

- high quality furniture fittings

SISO
DENMARK


Cup drawing

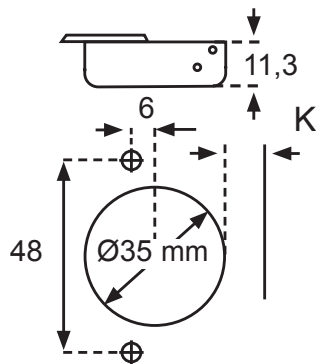


Opening angle: 110°
Depth of hinge cup: 11,3 mm
Diameter of hinge cup: 35 mm
Mounting of hinge: Screw on: c.c.48 mm
Possible drilling distances on the door (K): 3-7 mm
Door thickness: 14-24 mm

Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																													
Full overlay (A)	 Side panel Door	15.03.670 Incl. mounting plate H = 2 SISO logo in cup	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><th>2</th><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td></tr><tr><th>4</th><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td></tr></table>	D \ K	3	4	5	6	7	0	17	18	19	20	21	2	15	16	17	18	19	4	13	14	15	16	17						
D \ K	3	4	5	6	7																												
0	17	18	19	20	21																												
2	15	16	17	18	19																												
4	13	14	15	16	17																												
Half overlay (B)	 Side panel Door	15.03.675 Incl. mounting plate H = 2 SISO logo in cup	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td></tr><tr><th>2</th><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><th>4</th><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr></table>	D \ K	3	4	5	6	7	0	8	9	10	11	12	2	6	7	8	9	10	4	4	5	6	7	8						
D \ K	3	4	5	6	7																												
0	8	9	10	11	12																												
2	6	7	8	9	10																												
4	4	5	6	7	8																												
Inset (C)	 Side panel Door	15.03.680 Incl. mounting plate H = 4 SISO logo in cup	<table><tr><th>A \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>-1</td><td>-2</td><td>-3</td><td>-4</td><td>-,5</td></tr><tr><th>2</th><td>1</td><td>0</td><td>-1</td><td>-2</td><td>-3</td></tr><tr><th>4</th><td>3</td><td>2</td><td>1</td><td>0</td><td>-1</td></tr></table>	A \ K	3	4	5	6	7	0	-1	-2	-3	-4	-,5	2	1	0	-1	-2	-3	4	3	2	1	0	-1						
A \ K	3	4	5	6	7																												
0	-1	-2	-3	-4	-,5																												
2	1	0	-1	-2	-3																												
4	3	2	1	0	-1																												
	 Cabinet edge	H = 2/4 f/chipboard screws Slide-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																														
	 Cabinet edge	15.03.726 H = 2 f/euro screws Slide-on	To be ordered separately if euro screw mounting is wanted. Pre-mounted euro screws included.																														

MAXI HINGE Ø35 MM - 165° - 2-WAY

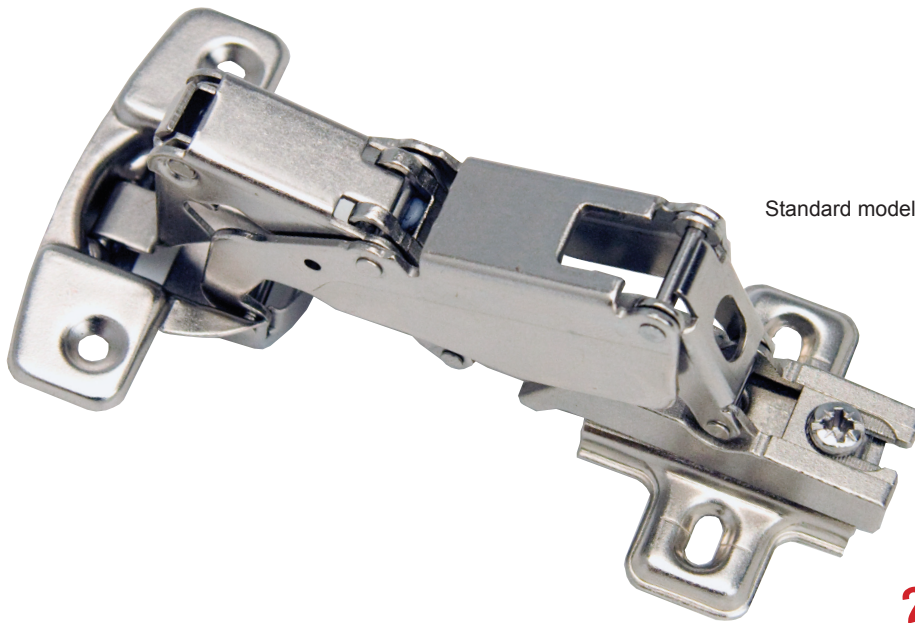


**2-WAY
Slide-on
FI 14-24 MM PANEL
Ø 35 MM**

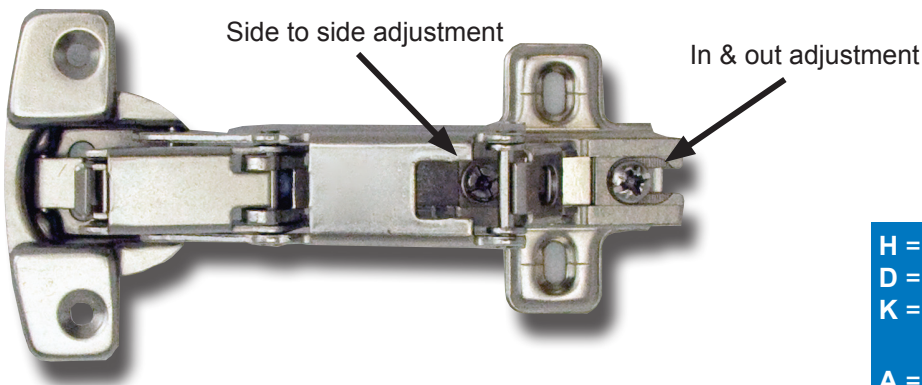


H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel


Full overlay (A)

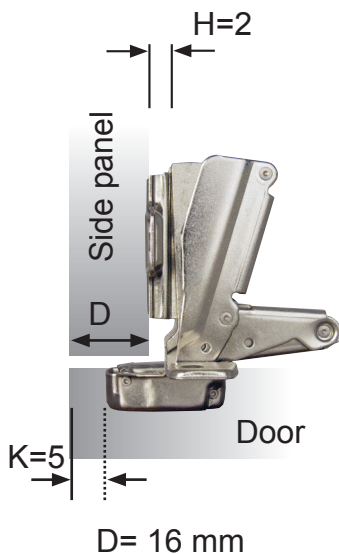

Half overlay (B)

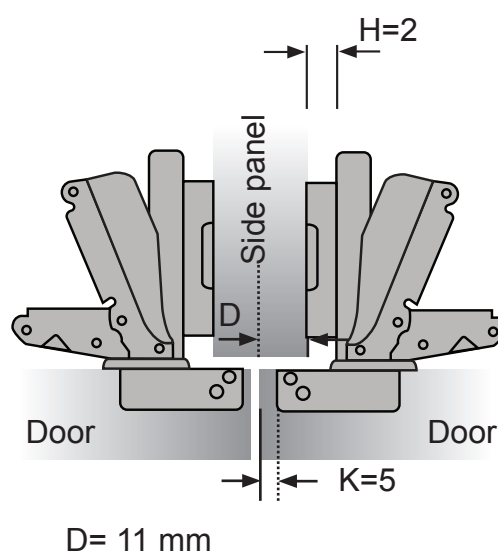

Inset (C)

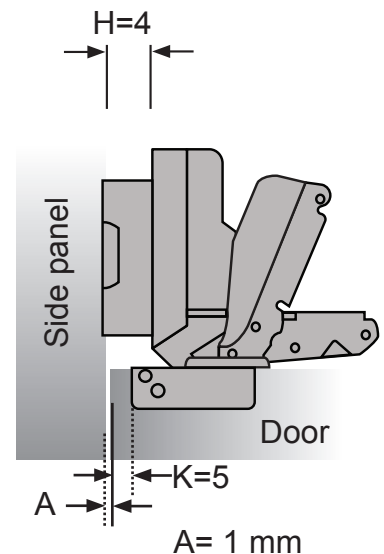


MAXI HINGE Ø35 MM - 165° - 2-WAY

- high quality furniture fittings

SISO
DENMARK

Cup drawing

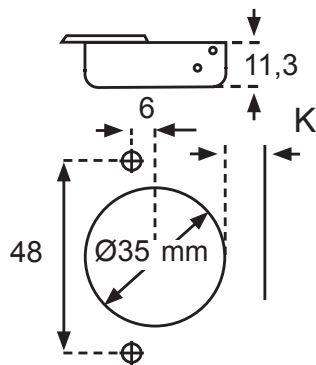

Opening angle: 165°
Depth of hinge cup: 11,3 mm
Diameter of hinge cup: 35 mm
Mounting of hinge: Screw on: c.c.48 mm
Possible drilling distances on the door (K): 3-7 mm
Door thickness: 14-24 mm

Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																													
Full overlay (A)		15.03.681 Incl. mounting plate H = 2 SISO logo in cup	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td></tr><tr><th>2</th><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td></tr><tr><th>4</th><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td></tr></table>	D \ K	3	4	5	6	7	0	16	17	18	19	20	2	14	15	16	17	18	4	12	13	14	15	16						
D \ K	3	4	5	6	7																												
0	16	17	18	19	20																												
2	14	15	16	17	18																												
4	12	13	14	15	16																												
Half overlay (B)		15.03.682 Incl. mounting plate H = 2 SISO logo in cup	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>11</td><td>12</td><td>13</td><td>14</td><td>15</td></tr><tr><th>2</th><td>9</td><td>10</td><td>11</td><td>12</td><td>13</td></tr><tr><th>4</th><td>7</td><td>8</td><td>9</td><td>10</td><td>11</td></tr></table>	D \ K	3	4	5	6	7	0	11	12	13	14	15	2	9	10	11	12	13	4	7	8	9	10	11						
D \ K	3	4	5	6	7																												
0	11	12	13	14	15																												
2	9	10	11	12	13																												
4	7	8	9	10	11																												
Inset (C)		15.03.683 Incl. mounting plate H = 4 SISO logo in cup	<table><tr><th>A \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>-1</td><td>-2</td><td>-3</td><td>-4</td><td>-5</td></tr><tr><th>2</th><td>1</td><td>0</td><td>-1</td><td>-2</td><td>-3</td></tr><tr><th>4</th><td>3</td><td>2</td><td>1</td><td>0</td><td>-1</td></tr></table>	A \ K	3	4	5	6	7	0	-1	-2	-3	-4	-5	2	1	0	-1	-2	-3	4	3	2	1	0	-1						
A \ K	3	4	5	6	7																												
0	-1	-2	-3	-4	-5																												
2	1	0	-1	-2	-3																												
4	3	2	1	0	-1																												
		H = 2/4 f/chipboard screws Slide-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																														
		15.03.726 H = 2 f/euro screws Slide-on	To be ordered separately if euro screw mounting is wanted. Pre-mounted euro screws included.																														


MAXI HINGE Ø 35 MM -100°

Standard model




**2-WAY
CLIP-ON
F/ 14-24 MM PANEL
Ø 35 MM**

Hinge w/mounting plate f/easy up & down adjustment (optional)

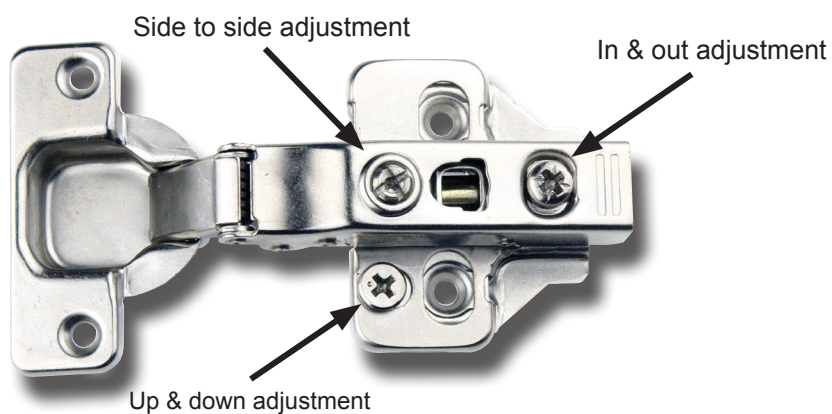


H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel

Full overlay (A)

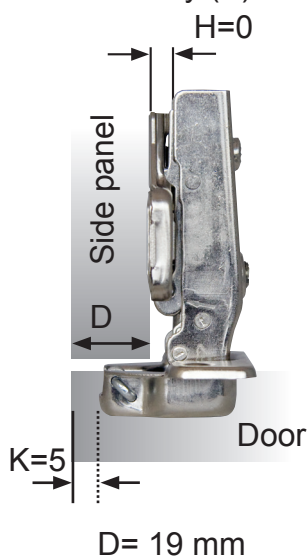

Half overlay (B)

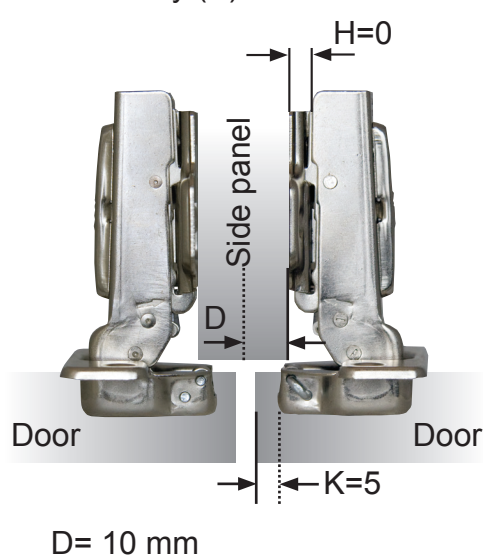

Inset (C)




MAXI HINGE Ø 35 MM -100°

- high quality furniture fittings






SISO
DENMARK

Cup drawing




Opening angle: 100°
Depth of hinge cup: 11,3 mm
Diameter of hinge cup: 35 mm
Mounting of hinge: Screw on: c.c.48 mm
Possible drilling distances on the door (K): 3-7 mm
Door thickness: 14- 24 mm.



Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																												
Full overlay (A)	 	15.03.735 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><th>2</th><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td></tr><tr><th>4</th><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td></tr></table>	D \ K	3	4	5	6	7	0	17	18	19	20	21	2	15	16	17	18	19	4	13	14	15	16	17					
D \ K	3	4	5	6	7																											
0	17	18	19	20	21																											
2	15	16	17	18	19																											
4	13	14	15	16	17																											
Half overlay (B)	 	15.03.736 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td></tr><tr><th>2</th><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><th>4</th><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr></table>	D \ K	3	4	5	6	7	0	8	9	10	11	12	2	6	7	8	9	10	4	4	5	6	7	8					
D \ K	3	4	5	6	7																											
0	8	9	10	11	12																											
2	6	7	8	9	10																											
4	4	5	6	7	8																											
Inset (C)	 	15.03.737 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>A \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>1,5</td><td>0,5</td><td>0,5</td><td>-1,5</td><td>-2,5</td></tr><tr><th>2</th><td>3,5</td><td>2,5</td><td>1,5</td><td>0,5</td><td>-0,5</td></tr><tr><th>4</th><td>5,5</td><td>4,5</td><td>3,5</td><td>2,5</td><td>1,5</td></tr></table>	A \ K	3	4	5	6	7	0	1,5	0,5	0,5	-1,5	-2,5	2	3,5	2,5	1,5	0,5	-0,5	4	5,5	4,5	3,5	2,5	1,5					
A \ K	3	4	5	6	7																											
0	1,5	0,5	0,5	-1,5	-2,5																											
2	3,5	2,5	1,5	0,5	-0,5																											
4	5,5	4,5	3,5	2,5	1,5																											
		H = 0 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																													
		15.03.728-1 H = 0 f/euro screws Clip-on	To be ordered separately if easy up & down adjustment is wanted. Pre-mounted euro screws included.																													
		15.03.730	Cover plate for screws on hinge cup																													


MAXI HINGE Ø 35 MM -165°

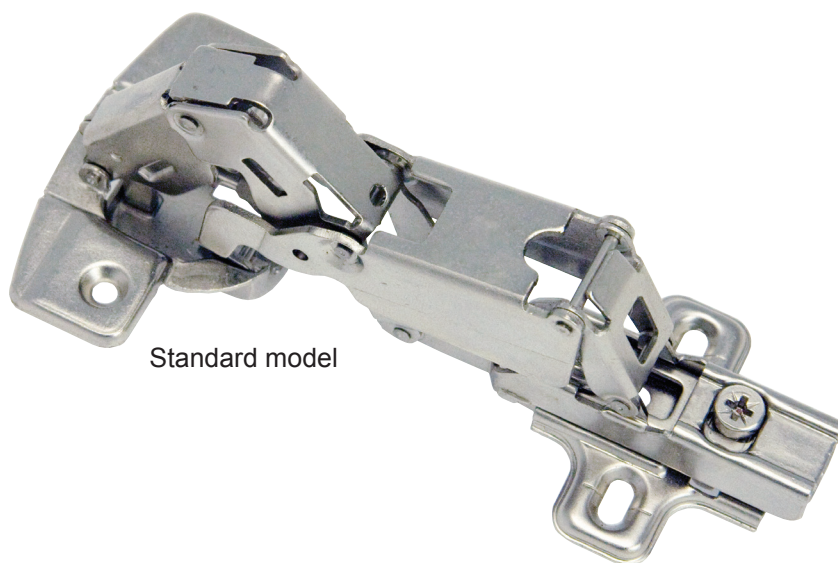

Standard model

**2-WAY
CLIP-ON
F/ 14-24 MM PANEL
Ø 35 MM**

Hinge w/mounting plate f/easy up & down adjustment (optional)



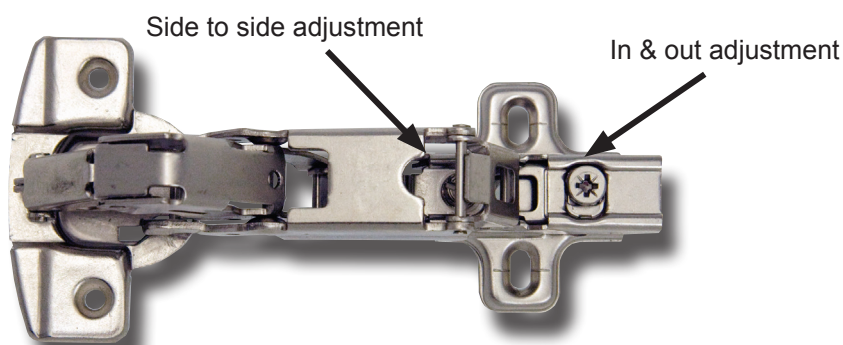


H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel

Full overlay (A)

Half overlay (B)

Inset (C)

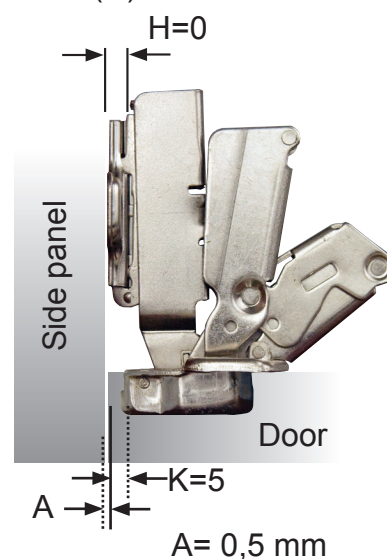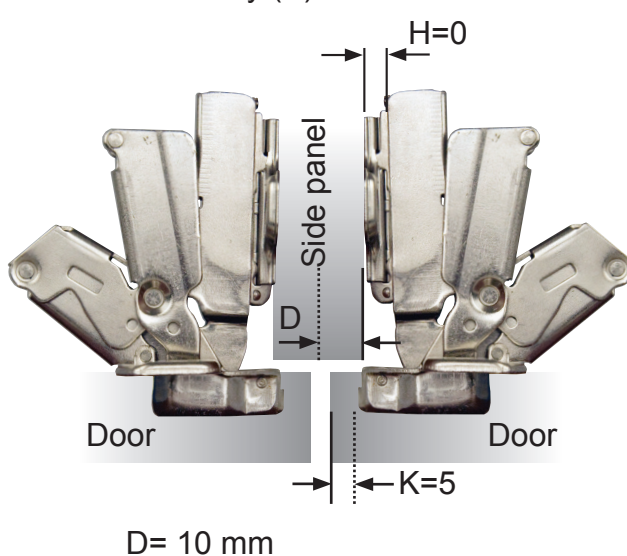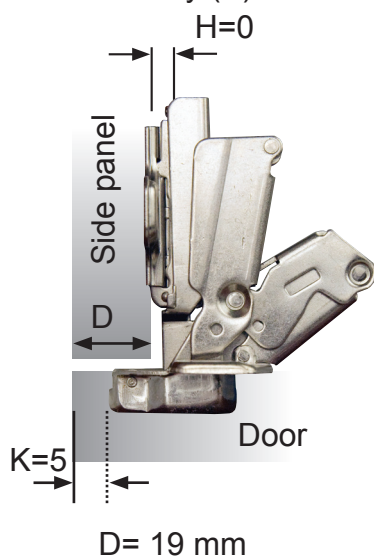


MAXI HINGE Ø 35 MM -165°






- high quality furniture fittings



Cup drawing

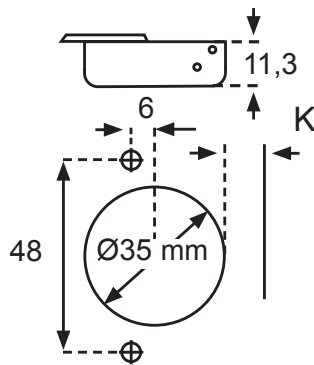


Opening angle: 165°
 Depth of hinge cup: 11,3 mm
 Diameter of hinge cup: 35 mm
 Mounting of hinge: Screw on: c.c.48 mm
 Possible drilling distances on the door (K): 3-8 mm
 Door thickness: 14- 26 mm.

Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																																			
Full overlay (A)		15.03.740 Incl. mounting plate H = 0	<table><tr><td>D \ K</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr><tr><td>H</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>0</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><td>2</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td></tr><tr><td>4</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td></tr></table>	D \ K	3	4	5	6	7	H						0	17	18	19	20	21	2	15	16	17	18	19	4	13	14	15	16	17						
D \ K	3	4	5	6	7																																		
H																																							
0	17	18	19	20	21																																		
2	15	16	17	18	19																																		
4	13	14	15	16	17																																		
Half overlay (B)		15.03.741 Incl. mounting plate H = 0	<table><tr><td>D \ K</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr><tr><td>H</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>0</td><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td></tr><tr><td>2</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><td>4</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr></table>	D \ K	3	4	5	6	7	H						0	8	9	10	11	12	2	6	7	8	9	10	4	4	5	6	7	8						
D \ K	3	4	5	6	7																																		
H																																							
0	8	9	10	11	12																																		
2	6	7	8	9	10																																		
4	4	5	6	7	8																																		
Inset (C)		15.03.742 Incl. mounting plate H = 4	<table><tr><td>A \ K</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr><tr><td>H</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>0</td><td>1,5</td><td>0,5</td><td>0,5</td><td>-1,5</td><td>-2,5</td></tr><tr><td>2</td><td>3,5</td><td>2,5</td><td>1,5</td><td>0,5</td><td>-0,5</td></tr><tr><td>4</td><td>5,5</td><td>4,5</td><td>3,5</td><td>2,5</td><td>1,5</td></tr></table>	A \ K	3	4	5	6	7	H						0	1,5	0,5	0,5	-1,5	-2,5	2	3,5	2,5	1,5	0,5	-0,5	4	5,5	4,5	3,5	2,5	1,5						
A \ K	3	4	5	6	7																																		
H																																							
0	1,5	0,5	0,5	-1,5	-2,5																																		
2	3,5	2,5	1,5	0,5	-0,5																																		
4	5,5	4,5	3,5	2,5	1,5																																		
		H = 0 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																																				
		15.03.728-1 H = 0 f/euro screws Clip-on	To be ordered separately if easy up & down adjustment is wanted. Pre-mounted euro screws included.																																				



Hinge w/mounting plate f/easy up & down adjustment (optional)

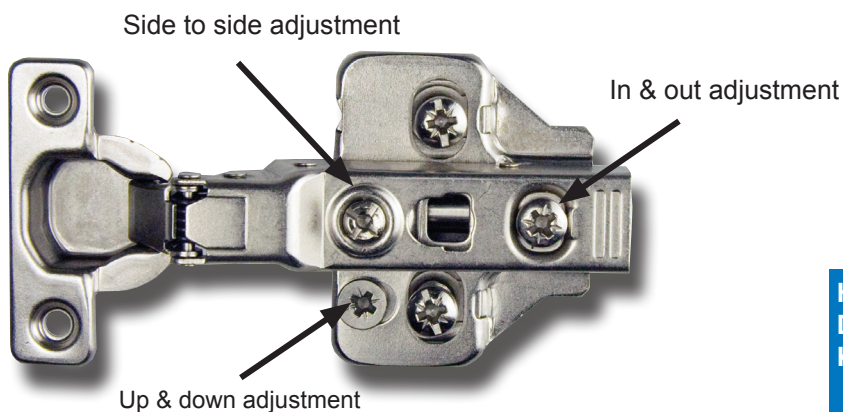


**SOFT CLOSE
CLIP-ON
FI 12-22 MM PANEL
Ø 26 MM**

H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel


Full overlay (A)



Half overlay (B)

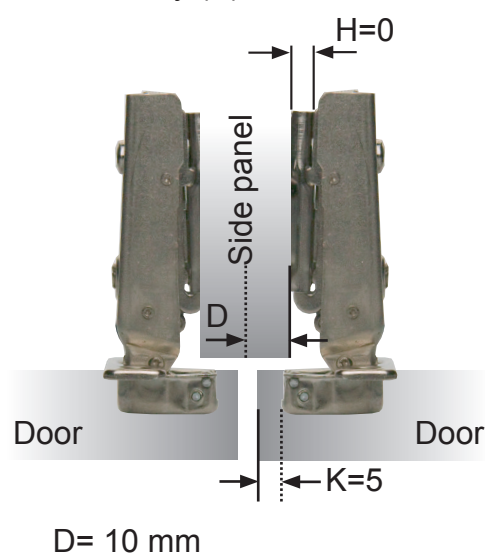


Inset (C)

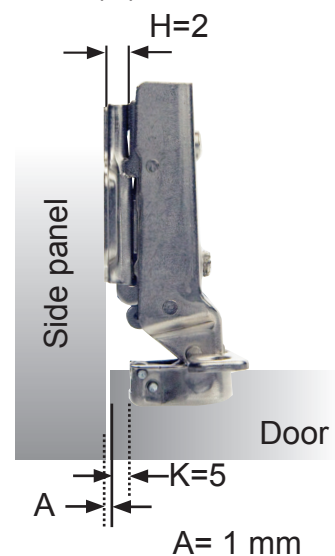

SOFT CLOSE MINI HINGE Ø 26 MM -100°

- high quality furniture fittings


SISO
DENMARK

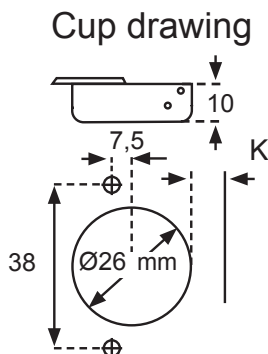


Opening angle:	100°
Depth of hinge cup:	10 mm
Diameter of hinge cup:	26 mm
Mounting of hinge: Screw on:	c.c.38 mm
Possible drilling distances on the door (K):	3-5 mm
Door thickness:	12-22 mm

Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																		
Full overlay (A)		15.02.650 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th></tr><tr><th>0</th><td>15,5</td><td>16,5</td><td>17,5</td></tr><tr><th>2</th><td>13,5</td><td>14,5</td><td>15,5</td></tr><tr><th>4</th><td>11,5</td><td>12,5</td><td>13,5</td></tr></table>	D \ K	3	4	5	0	15,5	16,5	17,5	2	13,5	14,5	15,5	4	11,5	12,5	13,5			
D \ K	3	4	5																			
0	15,5	16,5	17,5																			
2	13,5	14,5	15,5																			
4	11,5	12,5	13,5																			
Half overlay (B)		15.02.655 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th></tr><tr><th>0</th><td>6,5</td><td>7,5</td><td>8,7</td></tr><tr><th>2</th><td>4,5</td><td>5,5</td><td>6,5</td></tr><tr><th>4</th><td>2,5</td><td>3,5</td><td>4,5</td></tr></table>	D \ K	3	4	5	0	6,5	7,5	8,7	2	4,5	5,5	6,5	4	2,5	3,5	4,5			
D \ K	3	4	5																			
0	6,5	7,5	8,7																			
2	4,5	5,5	6,5																			
4	2,5	3,5	4,5																			
Inset (C)		15.02.660 Incl. SISO name plate + mounting plate H = 2	<table><tr><th>A \ K</th><th>3</th><th>4</th><th>5</th></tr><tr><th>0</th><td>3</td><td>2</td><td>1</td></tr><tr><th>2</th><td>5</td><td>4</td><td>3</td></tr></table>	A \ K	3	4	5	0	3	2	1	2	5	4	3							
A \ K	3	4	5																			
0	3	2	1																			
2	5	4	3																			
		H = 0/2 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																			
		15.03.728-0 H = 0 f/euro screws Clip-on	To be ordered separately if easy up & down adjustment is wanted. Pre-mounted euro screws included.																			

SOFT CLOSE MAXI HINGE Ø 35 MM -100°

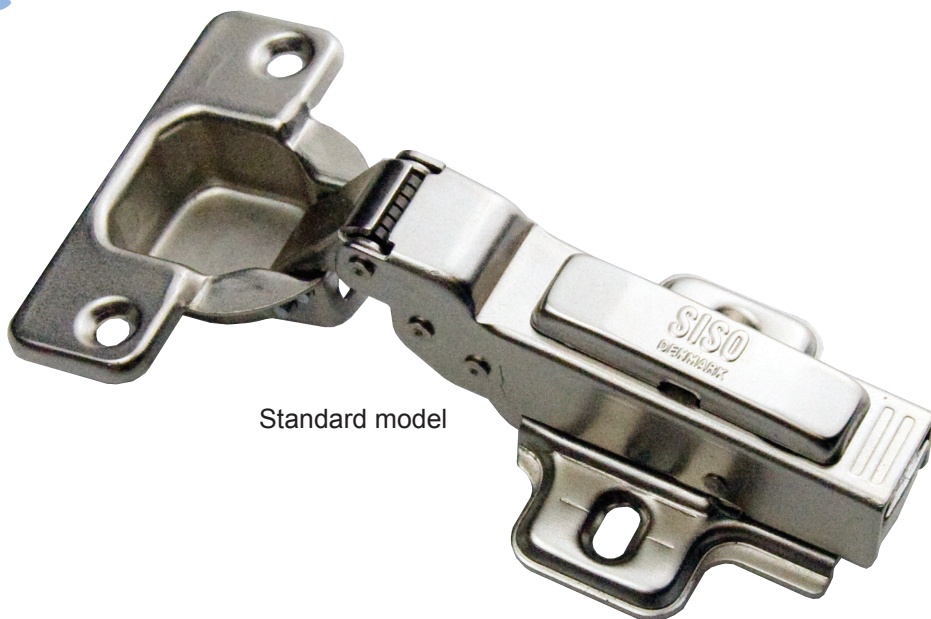

Hinge w/mounting plate f/easy up & down adjustment (optional)

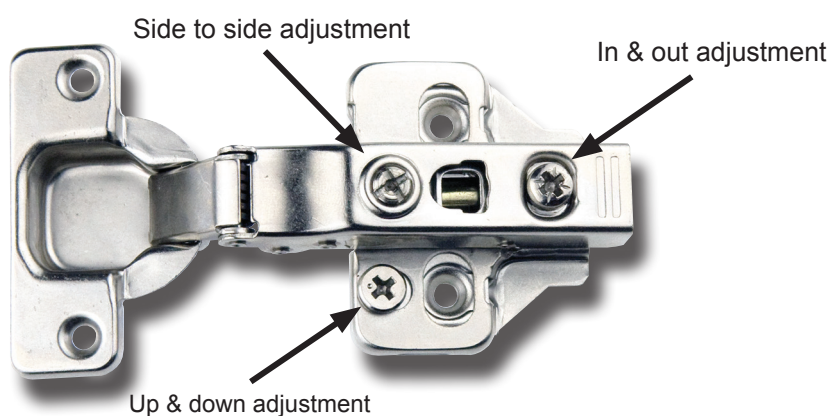


**SOFT CLOSE
CLIP-ON
FI 14-24 MM PANEL
Ø 35 MM**

H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel


Full overlay (A)



Half overlay (B)

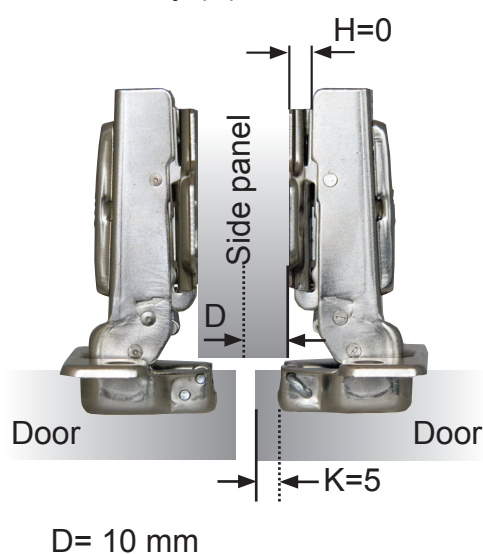

Inset (C)

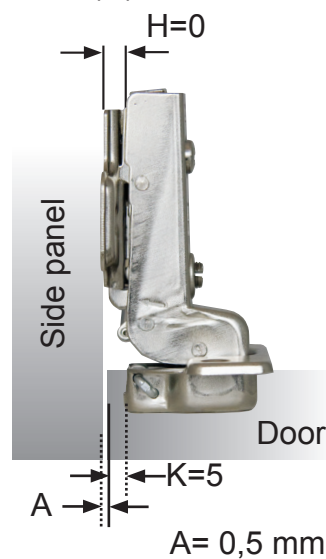


SOFT CLOSE MAXI HINGE Ø 35 MM -100°

- high quality furniture fittings








Cup drawing



Opening angle:	100°
Depth of hinge cup:	11,3 mm
Diameter of hinge cup:	35 mm
Mounting of hinge. Screw on:	c.c.48 mm
Possible drilling distances on the door (K):	3-7 mm
Door thickness:	14-24 mm



Steel - Nickel Plated or SS-304		Item No.	D: Overlay calculations	A: Gap calculations																												
Full overlay (A)		Steel: 15.03.731 SS-304: 15.03.760 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><th>2</th><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td></tr><tr><th>4</th><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td></tr></table>	D \ K	3	4	5	6	7	0	17	18	19	20	21	2	15	16	17	18	19	4	13	14	15	16	17					
D \ K	3	4	5	6	7																											
0	17	18	19	20	21																											
2	15	16	17	18	19																											
4	13	14	15	16	17																											
Half overlay (B)		Steel: 15.03.732 SS-304: 15.03.765 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td></tr><tr><th>2</th><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><th>4</th><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr></table>	D \ K	3	4	5	6	7	0	8	9	10	11	12	2	6	7	8	9	10	4	4	5	6	7	8					
D \ K	3	4	5	6	7																											
0	8	9	10	11	12																											
2	6	7	8	9	10																											
4	4	5	6	7	8																											
Inset (C)		Steel: 15.03.733 SS-304: 15.03.770 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>A \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>1,5</td><td>0,5</td><td>0,5</td><td>-1,5</td><td>-2,5</td></tr><tr><th>2</th><td>3,5</td><td>2,5</td><td>1,5</td><td>0,5</td><td>-0,5</td></tr><tr><th>4</th><td>5,5</td><td>4,5</td><td>3,5</td><td>2,5</td><td>1,5</td></tr></table>	A \ K	3	4	5	6	7	0	1,5	0,5	0,5	-1,5	-2,5	2	3,5	2,5	1,5	0,5	-0,5	4	5,5	4,5	3,5	2,5	1,5					
A \ K	3	4	5	6	7																											
0	1,5	0,5	0,5	-1,5	-2,5																											
2	3,5	2,5	1,5	0,5	-0,5																											
4	5,5	4,5	3,5	2,5	1,5																											
		H = 0 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																													
		15.03.728-0 H = 0 f/euro screws Clip-on	To be ordered separately if easy up & down adjustment is wanted. Pre-mounted euro screws included.																													
		15.03.730	Cover plate for screws on hinge cup																													

DOOR DAMPERS

DOOR DAMPER "BLUES" FOR DRILLING





Application: Soft close damper for doors and drawers

Material: Grey ABS

Overall size: Ø 10 x 50 mm

Item No.: # 15.04.517

LGA tested in Germany. Passed 80.000 cycles

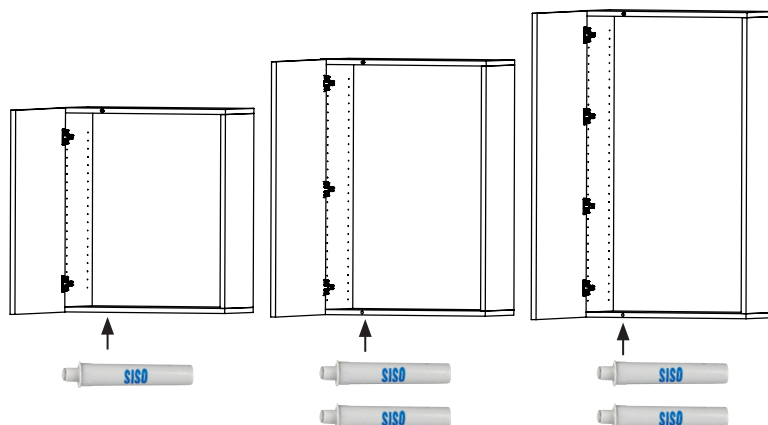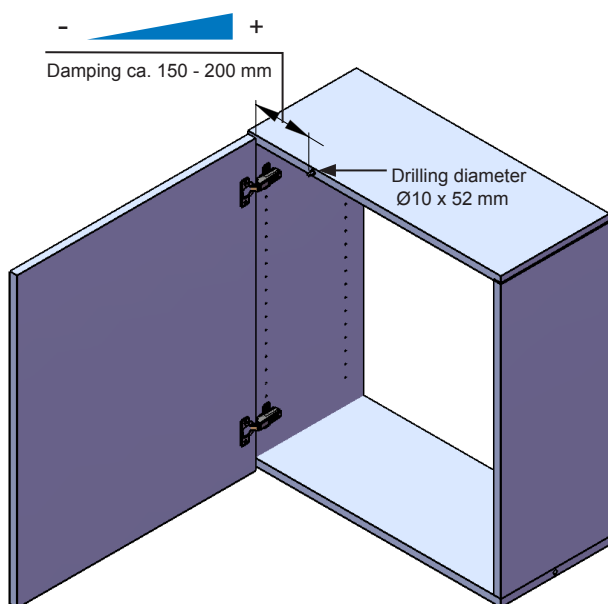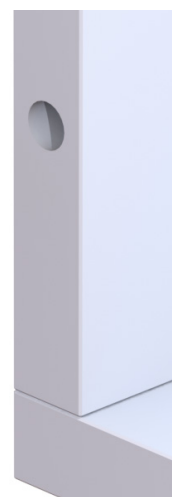

DOOR DAMPER BOX "BLUES" SCREW-ON




Application: Box for soft close damper

Material: Grey ABS

Overall size: 46 x 52 mm. c.c. 32 mm

Item No.: # 15.04.516

Damper and screws to be ordered separately

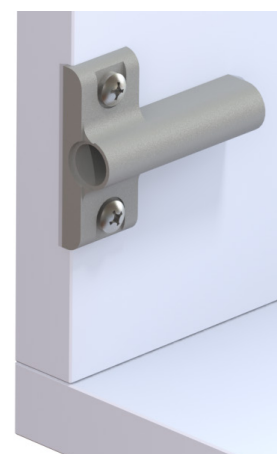

DOOR DAMPER BOX "BLUES"

- high quality furniture fittings



DOOR DAMPER BOX INVISIBLE "BLUES"




Application: Box for soft close damper

Material: Grey ABS

Overall size: 20 x 53,5 mm. c.c. 32 mm

Item No.: # 15.04.515

Damper and screws to be ordered separately

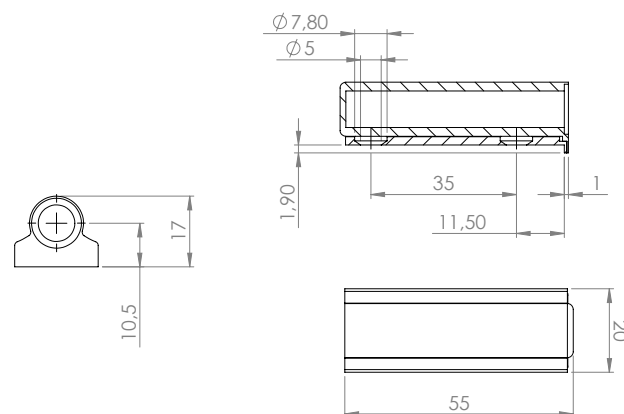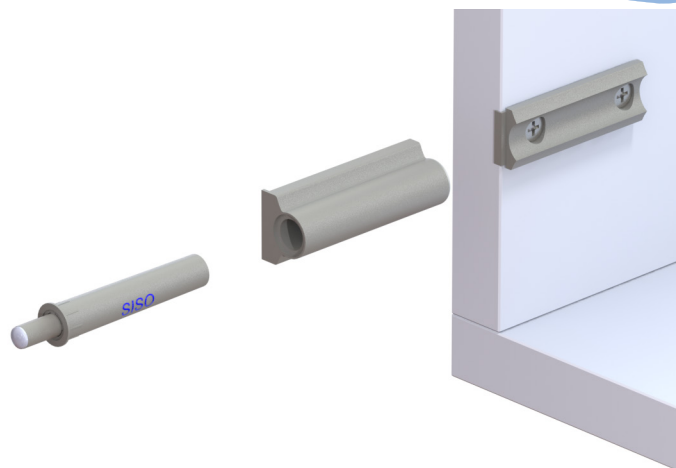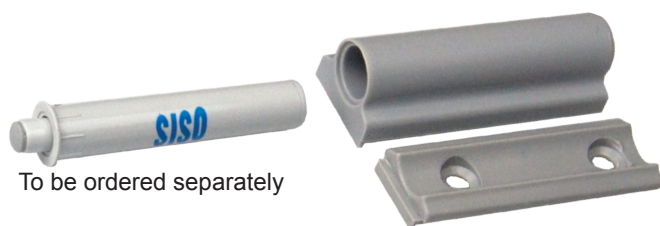

DOOR DAMPER BOX INVISIBLE "BLUES"


Application: Box for soft close damper

Material: Grey ABS


Overall size: 13 x 53,5 mm. c.c. 21 mm

Item No.: # 15.04.514


Damper and screws to be ordered separately

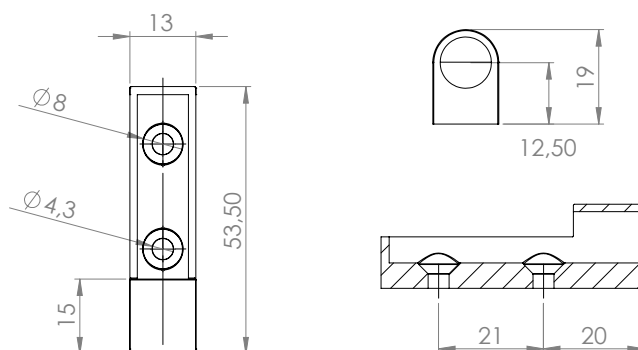

MAXI HINGE PTO Ø 35 MM -100°

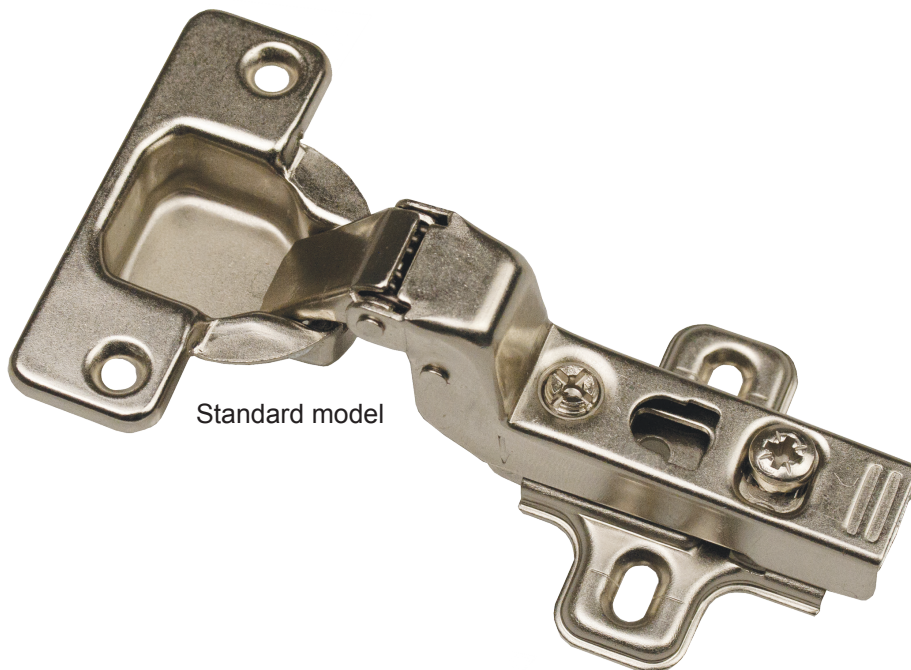

Hinge w/mounting plate f/easy up & down adjustment (optional)

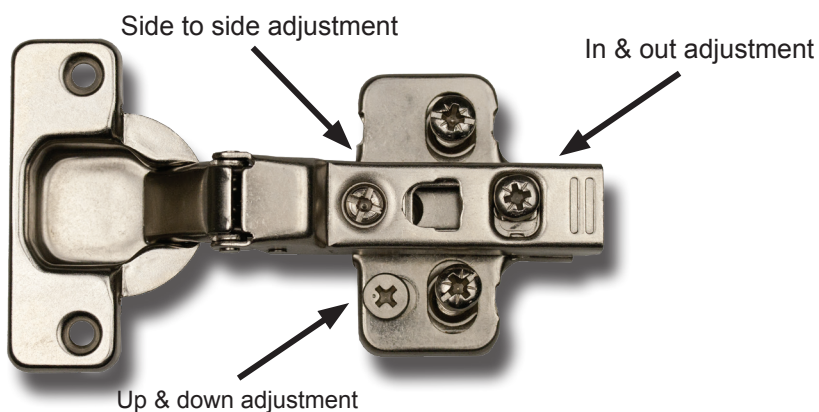


**PUSH TO OPEN
CLIP-ON
F/ 14-24 MM PANEL
Ø 35 MM**

H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel

Full overlay (A)



Half overlay (B)

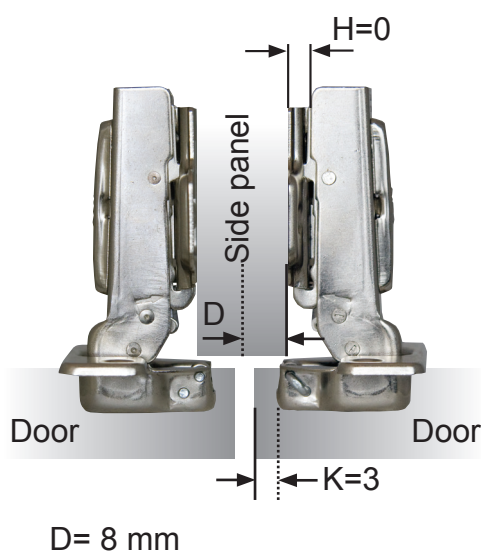


Inset (C)



MAXI HINGE PTO Ø 35 MM -100°

- high quality furniture fittings






Cup drawing

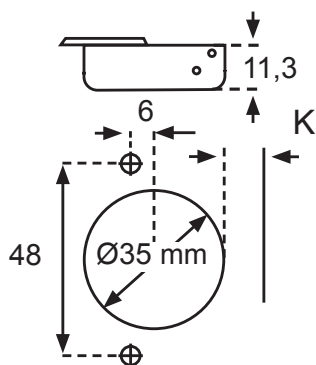

Opening angle:	100°
Depth of hinge cup:	11,3 mm
Diameter of hinge cup:	35 mm
Mounting of hinge. Screw on:	c.c.48 mm
Possible drilling distances on the door (K):	3-7 mm
Door thickness:	14-24 mm



To be used with Touch Latches "Slim" page 22-23

Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																												
Full overlay (A)		15.03.745 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><th>2</th><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td></tr><tr><th>4</th><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td></tr></table>	D \ K	3	4	5	6	7	0	17	18	19	20	21	2	15	16	17	18	19	4	13	14	15	16	17					
D \ K	3	4	5	6	7																											
0	17	18	19	20	21																											
2	15	16	17	18	19																											
4	13	14	15	16	17																											
Half overlay (B)		15.03.746 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td></tr><tr><th>2</th><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><th>4</th><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr></table>	D \ K	3	4	5	6	7	0	8	9	10	11	12	2	6	7	8	9	10	4	4	5	6	7	8					
D \ K	3	4	5	6	7																											
0	8	9	10	11	12																											
2	6	7	8	9	10																											
4	4	5	6	7	8																											
Inset (C)		15.03.747 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>A \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>1</td><td>0</td><td>-1</td><td>-2</td><td>-3</td></tr><tr><th>2</th><td>3</td><td>2</td><td>1</td><td>0</td><td>-1</td></tr><tr><th>4</th><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td></tr></table>	A \ K	3	4	5	6	7	0	1	0	-1	-2	-3	2	3	2	1	0	-1	4	5	4	3	2	1					
A \ K	3	4	5	6	7																											
0	1	0	-1	-2	-3																											
2	3	2	1	0	-1																											
4	5	4	3	2	1																											
		H = 0 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																													
		15.03.728-1 H = 0 f/euro screws Clip-on	To be ordered separately if easy up & down adjustment is wanted. Pre-mounted euro screws included.																													

TOUCH LATCHES "PUSH-TO-OPEN"

TOUCH LATCH "SLIM" W/SOFT BUMPER

Application: Push-to-open touch latch for doors and drawers


Material: Black ABS, White ABS, Grey ABS RAL 7040

Overall size: 85 x 14,5 mm

Extended: 105,5 mm

Item No.: # 22.01.108 (Black)
22.01.109 (Grey)
22.01.109-5 (White)

Screws to be ordered separately

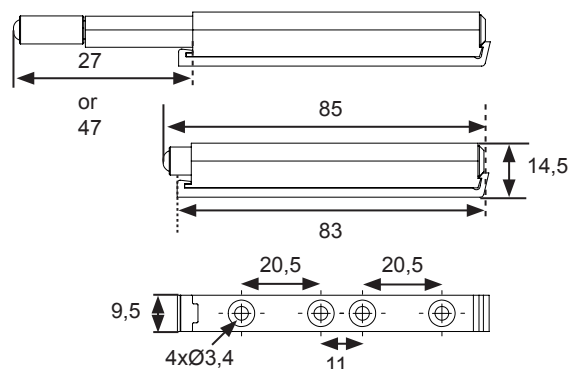

MAGNET TOUCH LATCH "SLIM" W/STRIKER

Application: Push-to-open touch latch for doors and drawers with magnet & striker. Suitable for wood & glass fronts

Material: Black ABS, White ABS, Grey ABS RAL 7040




Overall size: 84,5 x 14,5 mm

Extended: 105 mm

Item No.: # 22.01.104 (White)
22.01.105 (Black)
22.01.106 (Grey)

Incl. Steel striker 20 x 20 mm with adhesive tape for glass fixing & screw hole for wood fixing

Screws to be ordered separately

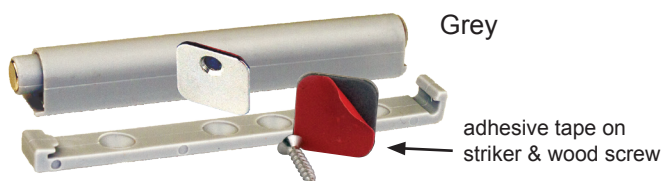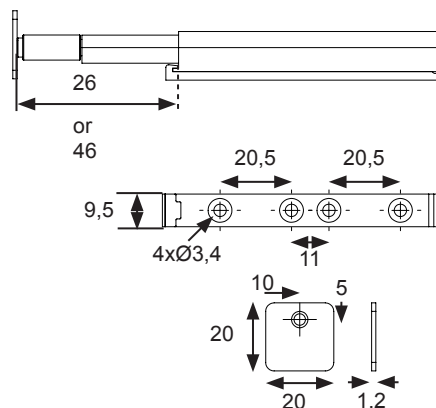

CABINET HINGE 135 DEGREE F/ CHAMFERED EDGES

- high quality furniture fittings







Application: 135 degree hinge for 45 degree edges.
3 dimensional adjustment

Material: Cup body - zamak – nickel plated
Linkage – steel - nickel plated

Door thickness: 16 – 22 mm

Size: Ø 35 x 13,5 mm cup – c.c.: 52 mm

Item No.: 15.04.020

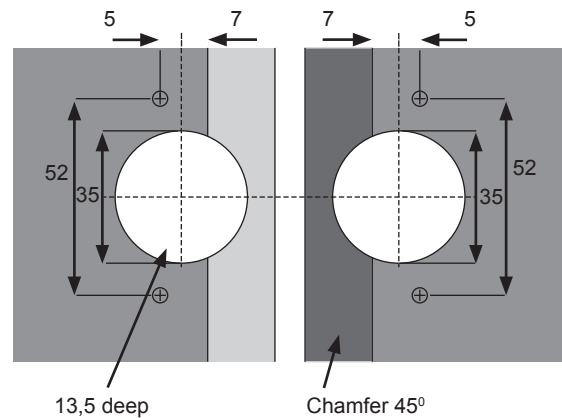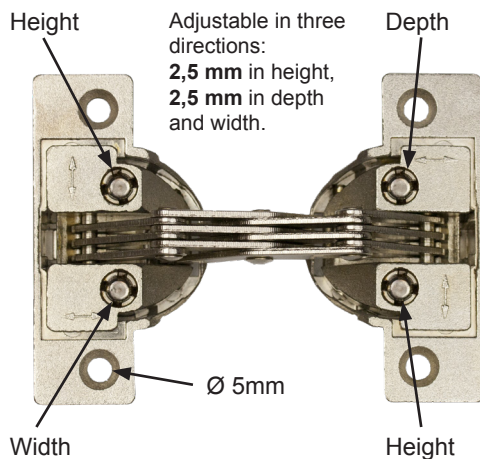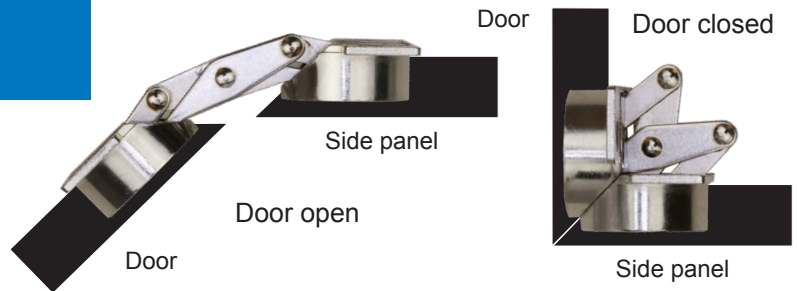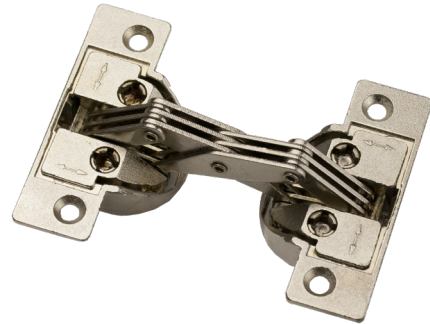

WIDE OPENING HINGE 240 DEGREE F/10-13 MM PANELS

Application: Wide opening hinge 240 degree
opening for overlay doors.
With catch function & visible axle.





Material: Zamak – Nickel plated

Overlay: 3,5 mm

Door thickness : 10 – 13 mm

Overall size: 66 x 64 mm

Item No.: # 15.04.100

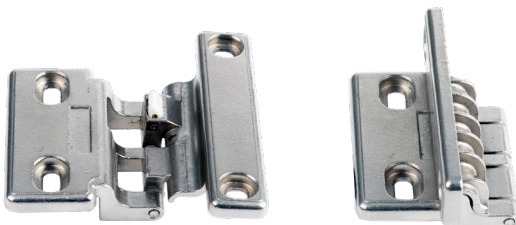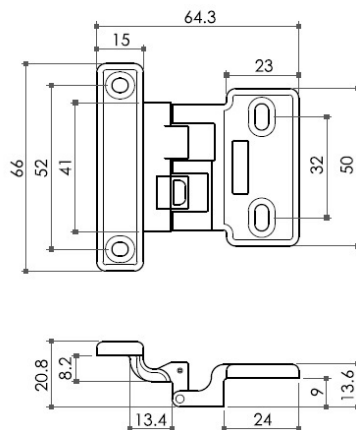

WIDE OPENING HINGE -270°

Application:

Wide opening hinge 270° opening for overlay doors. With catch function & visible axle.

Material: Zamak – Nickel plated

Cup wing:

Ø 35 x 12 mm. C.c: 45mm hole distance.
Wood screw fixation. Ø 4 mm.

Mounting plate:

Clip-on. C.c: 32 mm hole distance.
With vertical & lateral adjustment function.
Wood screw fixation. Ø 4 mm.

Door thickness: 16 – 19 mm

F/16mm panels # 15.04.079

F/19mm panels # 15.04.080


Other finishes on request.



**CLIP-ON
F/ 16-19 MM PANEL
FULL-OVERLAY**








Spring loaded catch

Set screw for vertical adjustment



Clip-on release handle


Set screw for lateral adjustment

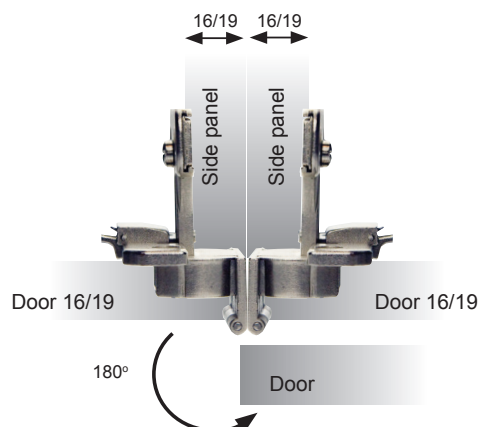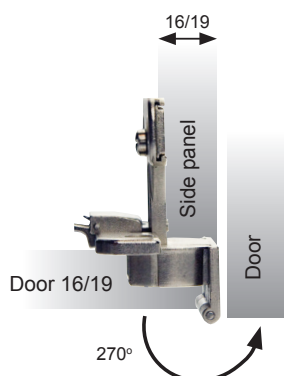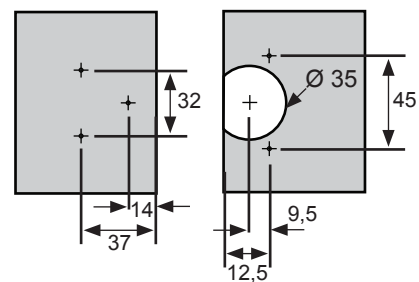

"FORTE" SELF-CLOSING HINGE

- high quality furniture fittings

SISO
DENMARK

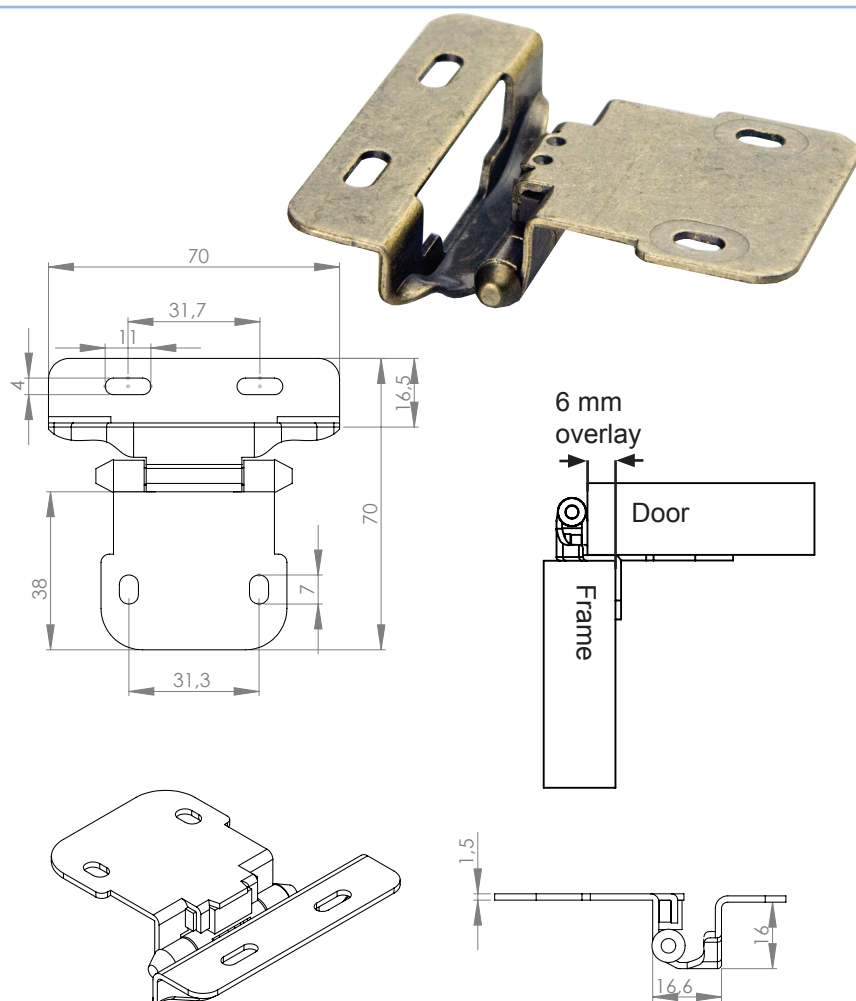

Application:

Antique style hinge with visible axle & catch function.

Material: Steel – Bronze plated

Overlay: 6 mm


Overall size: 70 x 70 mm

Item No.: # 15.90.011

Screws to be ordered separately



"VARIA" SELF-CLOSING HINGE

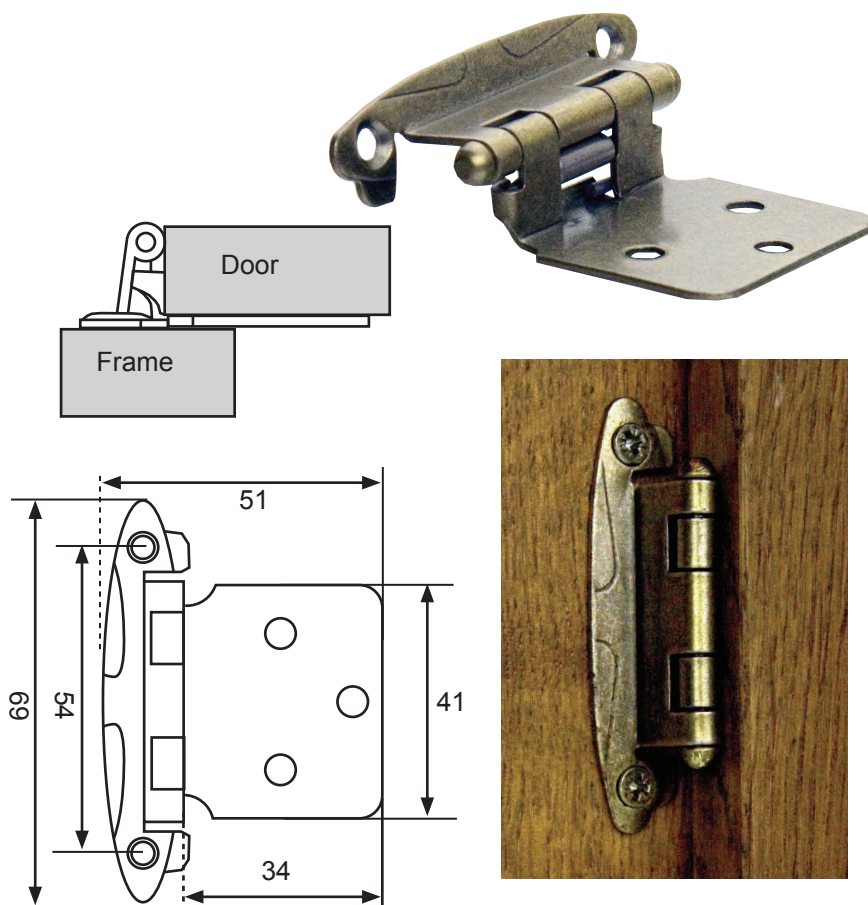

Application:

Antique style hinge with visible axle & catch function.

Material: Steel – Bronze plated

Overlay: Variable

Overall size: 51 x 69 mm

Item No.: # 15.90.010



Screws to be ordered separately




FLAP HINGES

FLAP HINGE, DETACHABLE

Material:	Zamak	
Finish:	Bronzed	# 15.09.077
	Nickel Plated	# 15.09.078
Size:	Ø 30 x 10 mm	
Opening:	90 degree	

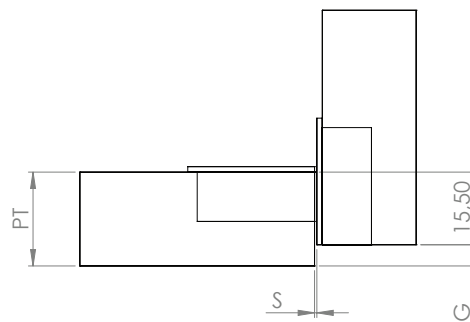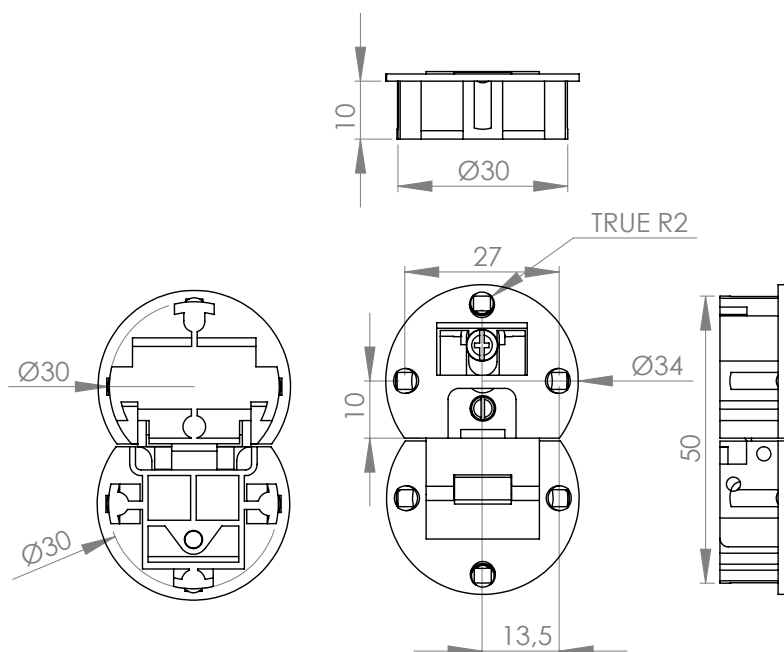



S: Adjustable 0 - 2,50 mm



PT = Plate thickness	G = Gap
16 mm	0,50 mm
17 mm	1,50 mm
18 mm	2,50 mm
19 mm	3,50 mm
20 mm	4,50 mm
21 mm	5,50 mm
22 mm	6,50 mm



FLAP HINGE, FOR THIN FLAPS

Material:	Flap : Zamak	
	House: Plastic	
Size:	Ø 30 x 12 mm	(House)
	Ø 30 x 4 mm	(Flap)
Opening:	90 Degree	
Finish:	White/Nickel	# 15.09.105
	Brown/Nickel	# 15.09.120

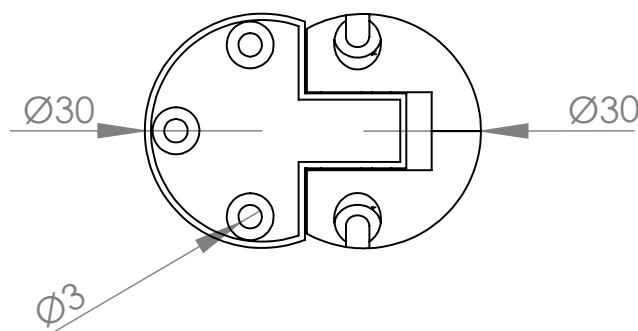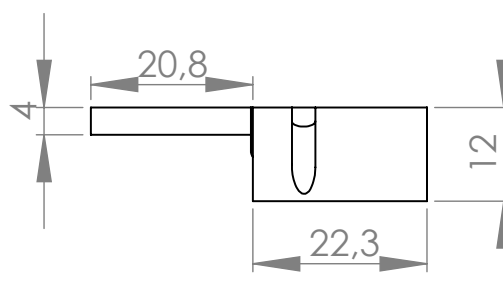

STEEL FLAP HINGES

Material:	Steel		
Size:	Ø 30 x 1,5 mm		
Holes:	Ø 4 mm		
Finish:	Brass Plated (BPL)	# 15.09.410	
	Bronzed	# 15.09.411	

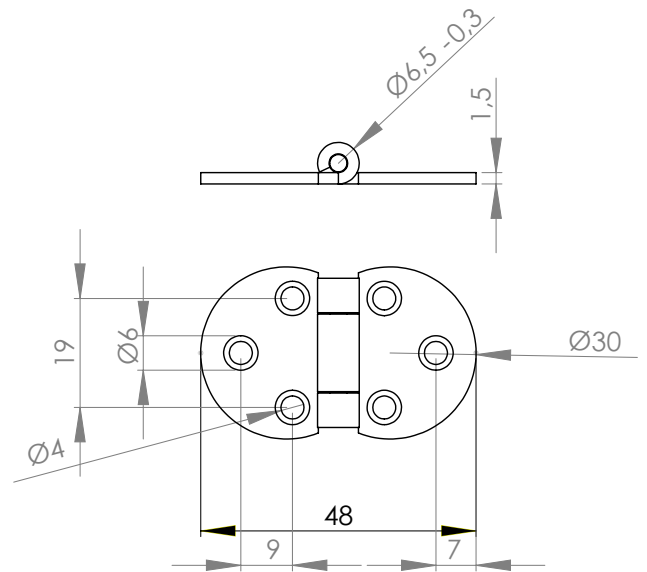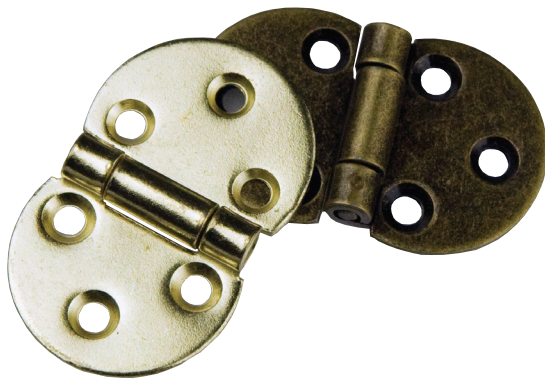

BRASS & SS-316 FLAP HINGES



Material: Brass or Stainless Steel (SS) AISI 316

Screw holes: Ø 4,5 mm

Size	Material	Finish	Item No.
30 x 80 x 1,75 mm	Brass	Polished	15.11.220
30 x 80 x 1,75 mm	Brass	Sanded	15.11.230
30 x 80 x 2,00 mm	SS	Polished	15.11.190




Flap hinge,
Stainless Steel

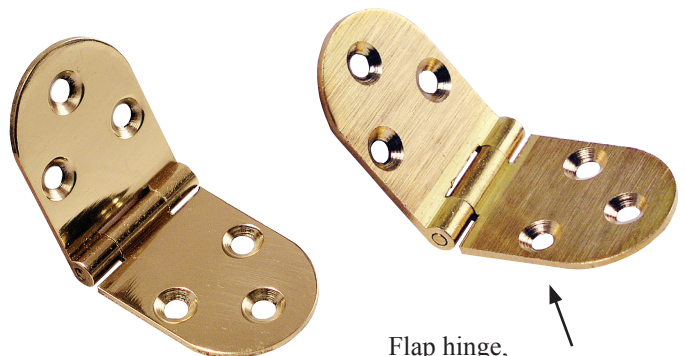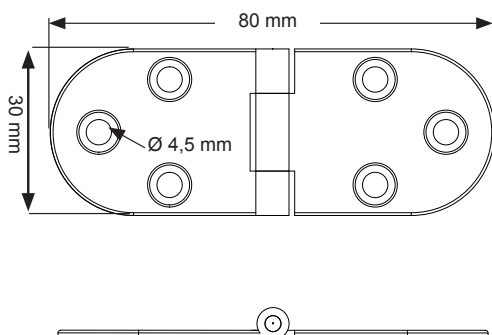

Flap hinge,
Polished Brass & Sanded

FLAP HINGES

BRASS FLAP HINGE "SLIM"

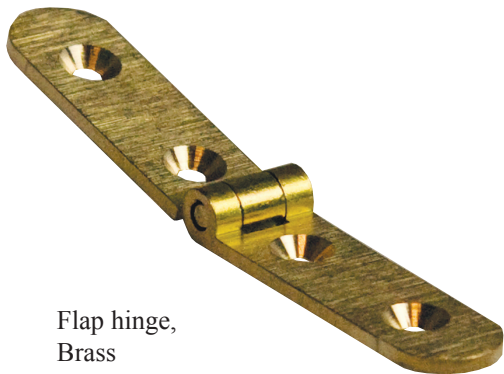


Flap hinge,
Brass

Material: Brass

Screw holes: Ø 3 mm

Size	Material	Finish	Item No.
13 x 80 x 1,75 mm	Brass	Sanded	15.11.215

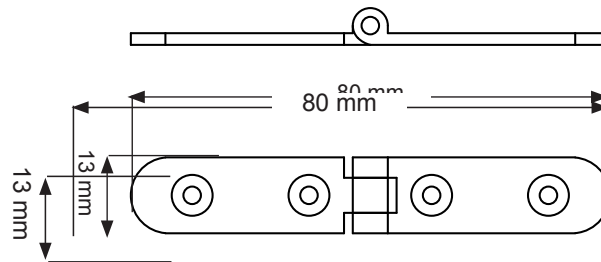

SS-304 FLAP HINGE


Material: SS-304 - brushed

Screw holes: Ø 5 mm

Size: 98 x 70 x 2 mm

Item No.: # 22.23.170

Incl. 6 CSK M4 x 8 mm screws

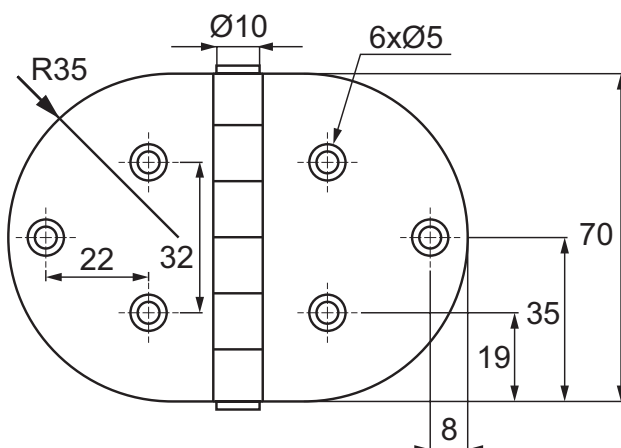

BUTT HINGES



- high quality furniture fittings

BRASS BUTT HINGES

Material: Brass or Stainless Steel (SS) AISI 316

Screw holes: Ø 3,5 mm


Size: W/H/T	Material	Finish	Item No.
40 x 35 x 1,4 mm	Brass	Sanded	# 15.13.060
50 x 40 x 1,4 mm	Brass	Sanded	# 15.13.090
60 x 50 x 1,8 mm	Brass	Polished	# 15.13.125

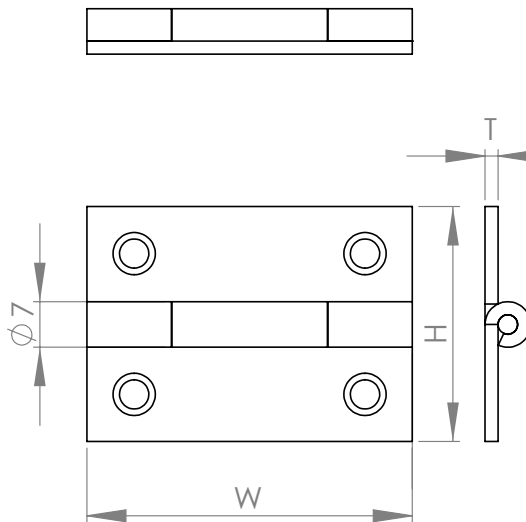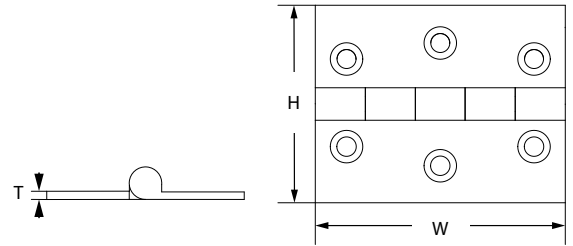

STEEL BUTT HINGES

Material: Steel
Finish: Bright Zinc Plated (BZP)
Brass Plated (BPL)




Size: W/H/T	Screw Holes	Finish	Item No.
25 x 24 x 1,2 mm	4 x Ø 4 mm	BZP	# 15.13.050
25 x 24 x 1,2 mm	4 x Ø 4 mm	BPL	# 15.13.051
40 x 33 x 1,4 mm	4 x Ø 4 mm	BZP	# 15.13.055
50 x 37 x 1,5 mm	4 x Ø 4,5 mm	BPL	# 15.13.083
50 x 37 x 1,5 mm	6 x Ø 5,5 mm	BZP	# 15.13.085
65 x 41 x 1,5 mm	6 x Ø 4,5 mm	BZP	# 15.13.130
65 x 41 x 1,5 mm	6 x Ø 4,5 mm	BPL	# 15.13.131
75 x 48 x 1,5 mm	6 x Ø 5 mm	BZP	# 15.13.211
75 x 48 x 1,5 mm	6 x Ø 5 mm	BPL	# 15.13.212
90 X 54 X 1,75 mm	6 x Ø 6 mm	BZP	# 15.13.216
90 X 54 X 1,75 mm	6 x Ø 6 mm	BPL	# 15.13.217

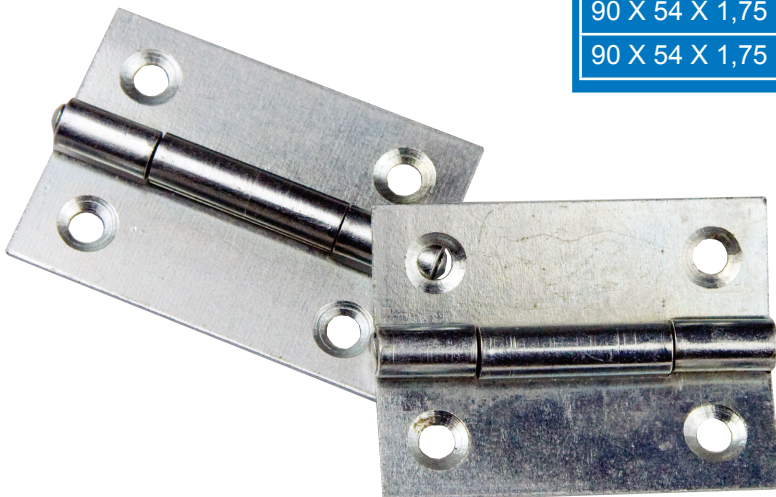

FLUSH & PIN HINGES



FLUSH HINGE "STRAIGHT"

Material:	Steel, Brass Plated
Size:	76 x 28 x 1,4 mm
Screw holes:	Ø5 mm
Item No.:	# 15.20.200

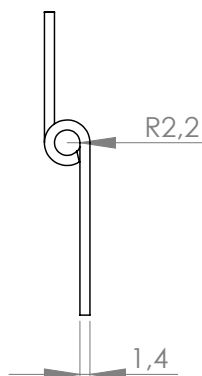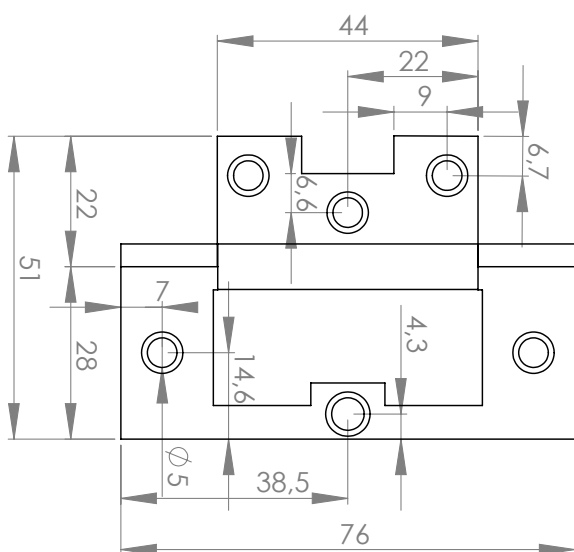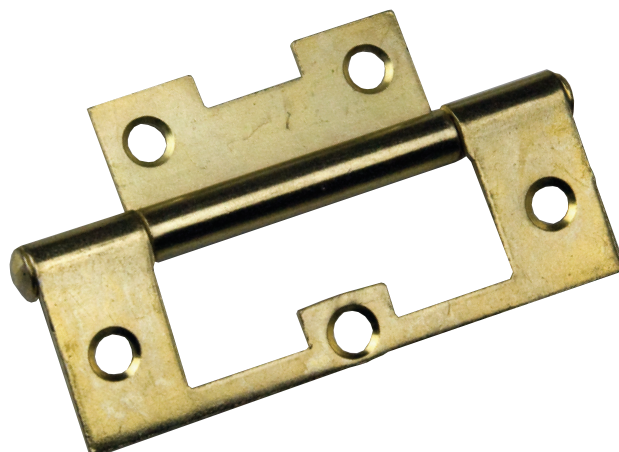

PIN HINGE F/WOODEN CABINETS

Material:	Steel
Size:	Ø9 x 26 mm
Finish:	Brass Plated
Item No.:	# 15.08.040

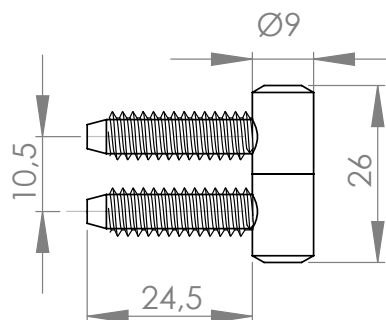

SELF CLOSING DOOR HINGES IN SS-304

- high quality furniture fittings

LIFT DOOR HINGE F/OVERLAY DOORS

Stainless steel 304, brushed.
Self closing. By up/down function.
Outwards opening.
Inclusive screws for panel mounting.
Left or right hand.

Size: 90 x 75 x 2,5 mm

Item No.:



Right Hand # 22.23.160
Left Hand # 22.23.161



Left hand



Right hand



LIFT DOOR HINGE F/INSET DOORS

Stainless steel 304, brushed.
Self closing. By up/down function.
Out or inwards opening.
Inclusive screws for panel mounting.
Left or right hand.

Size: 94 x 67 x 2,5 mm

Item No.:



Right Hand # 22.23.163
Left Hand # 22.23.164



Left hand



Right hand




SPRING DOOR HINGES F/INSET DOORS

Stainless steel 304, brushed.
Inwards opening.
Self closing by spring function
Inclusive screws for panel mounting. Uni-
versal.

Size: 90 x 52 x 2 mm

Item No.: # 22.23.165

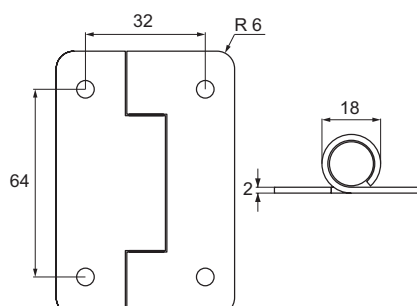


SOFT CLOSE ALUMINIUM FRAME HINGE -100°




Standard model

**SOFT CLOSE
CLIP-ON
FI 19-24 MM PANEL**

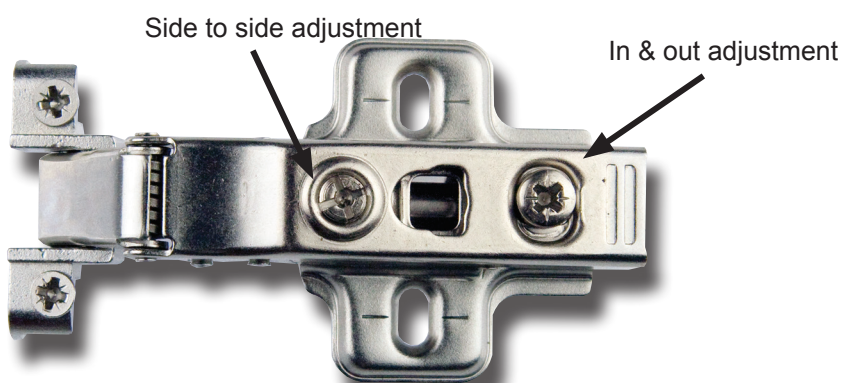


H = height of mounting plate
D = required door overlay
V = width of aluminium frame
A = gap between door and sidepanel


Full overlay (A)

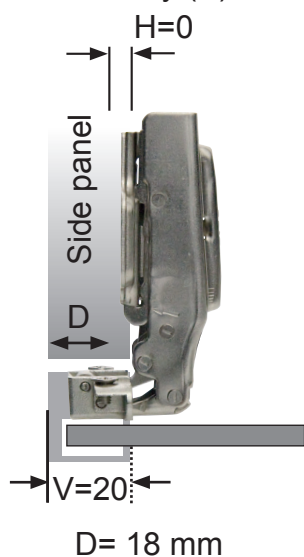

Half overlay (B)

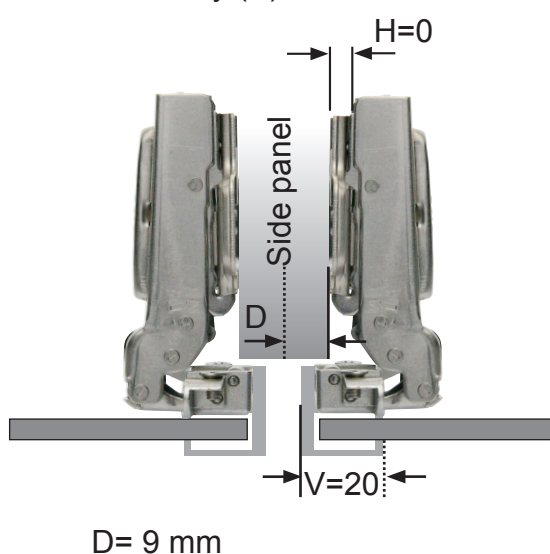

Inset (C)

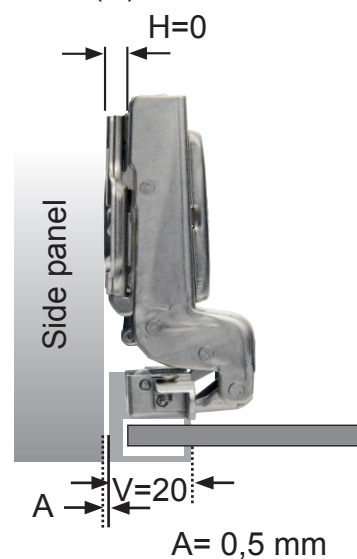

SOFT CLOSE


- high quality furniture fittings



ALUMINIUM FRAME HINGE -100°




Soft close hinge f/alu frames w/ mounting plate f/ easy up and down adjusting (optional)





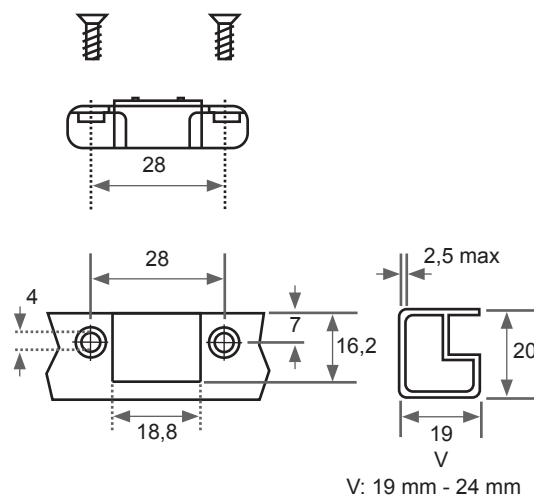


Opening angle: 100°

Mounting of hinge: Screw - on c.c. 28 mm

Width of aluminium frame (V): 19-24 mm



Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																																								
Full overlay (A)		15.03.800 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ V</th><th>19</th><th>20</th><th>21</th><th>22</th><th>23</th></tr><tr><th>H</th><td></td><td></td><td></td><td></td><td></td></tr><tr><th>0</th><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><th>2</th><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td></tr><tr><th>4</th><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td></tr></table>	D \ V	19	20	21	22	23	H						0	17	18	19	20	21	2	15	16	17	18	19	4	13	14	15	16	17											
D \ V	19	20	21	22	23																																							
H																																												
0	17	18	19	20	21																																							
2	15	16	17	18	19																																							
4	13	14	15	16	17																																							
Half overlay (B)		15.03.801 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ V</th><th>19</th><th>20</th><th>21</th><th>22</th><th>23</th></tr><tr><th>H</th><td></td><td></td><td></td><td></td><td></td></tr><tr><th>0</th><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td></tr><tr><th>2</th><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><th>4</th><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr></table>	D \ V	19	20	21	22	23	H						0	8	9	10	11	12	2	6	7	8	9	10	4	4	5	6	7	8											
D \ V	19	20	21	22	23																																							
H																																												
0	8	9	10	11	12																																							
2	6	7	8	9	10																																							
4	4	5	6	7	8																																							
Inset (C)		15.03.802 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>A \ V</th><th>19</th><th>20</th><th>21</th><th>22</th><th>23</th><th>24</th></tr><tr><th>H</th><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><th>0</th><td>1,5</td><td>0,5</td><td>-0,5</td><td>-1,5</td><td>-2,5</td><td>-3,5</td></tr><tr><th>2</th><td>3,5</td><td>2,5</td><td>1,5</td><td>0,5</td><td>-0,5</td><td>-1,5</td></tr><tr><th>4</th><td>5,5</td><td>4,5</td><td>3,5</td><td>2,5</td><td>1,5</td><td>0,5</td></tr></table>	A \ V	19	20	21	22	23	24	H							0	1,5	0,5	-0,5	-1,5	-2,5	-3,5	2	3,5	2,5	1,5	0,5	-0,5	-1,5	4	5,5	4,5	3,5	2,5	1,5	0,5						
A \ V	19	20	21	22	23	24																																						
H																																												
0	1,5	0,5	-0,5	-1,5	-2,5	-3,5																																						
2	3,5	2,5	1,5	0,5	-0,5	-1,5																																						
4	5,5	4,5	3,5	2,5	1,5	0,5																																						
		H = 0 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																																									
		15.03.728-0 H = 0 f/euro screws Clip-on	To be ordered separately if easy up & down adjustment is wanted. Pre-mounted euro screws included.																																									

GLASS DOOR HINGES "MINI" WITH FRONT COVER

AUTOMATIC GLASS DOOR HINGE WITH DOUBLE SPRING ACTION



Opening angle: 92°
Glass door drilling:
26 mm for glass thickness 4 to 6 mm
Supplied complete with wing mounting plate.
Steel nickel pl. 3 mm distance
for chipboard screw attachment
housing: plastic black
Hinge arm keyhole type,
steel nickel pl.

TYPE A = FULL OVERLAY DOORS


0 mm cranking # 15.01.700

TYPE C = INSET DOORS

17 mm cranking # 15.01.710




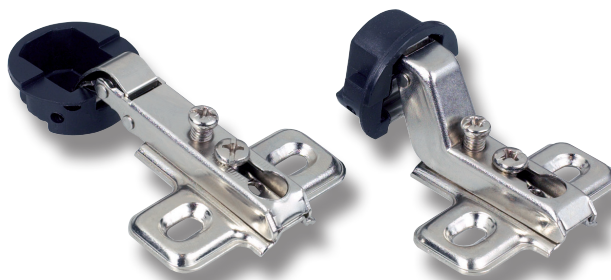


Application case
of glass hinge Ø26 mm
H - height of mounting plate
D - panel thickness
K - drilling distance from
the edge of glass door
to the edge of the hole
A - gap between door
and side board



D	K	3	4	5	6	7
H	0	15	16	17	18	19

A	K	3	4	5	6	7
H	0	3	2	1	0	-1





COVER CAPS FOR HINGE "MINI"

COVER CAPS FOR HINGE "MINI"

FRONT COVER PLASTIC

Round cover, chrome # 15.02.720
Round cover, gold # 15.02.721
Round cover, black # 15.02.722
Round cover, alu # 15.02.723
Round cover, matt NPL # 15.02.724

Oval cover, chrome # 15.02.730
Oval cover, gold # 15.02.731
Oval cover, black # 15.02.732
Oval cover, alu # 15.02.733
Oval cover, matt NPL # 15.02.734

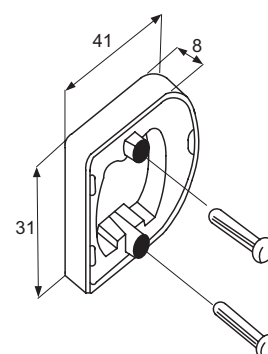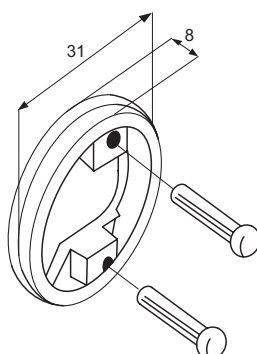

GLASS DOOR HINGES "SMART-92" WITH FRONT COVER

- high quality furniture fittings

SISO
DENMARK

GLASS DOOR HINGE „SMART-92“

Application

For inset doors. Ideal for furniture where only a very narrow wooden side-wall/pole is available. Direct fixing to side-wall/pole without any mounting plate

Mounting

Glass door drilling: Ø26 mm
Glass thickness: 4-6 mm C.C. 32 mm

Material


Hinge arm: Zamak, nickel plated
Hinge cup: Black plastic

Item No. # 15.01.000

Plastic cover cap Ø32 mm

Finish

Alu finish # 15.01.050

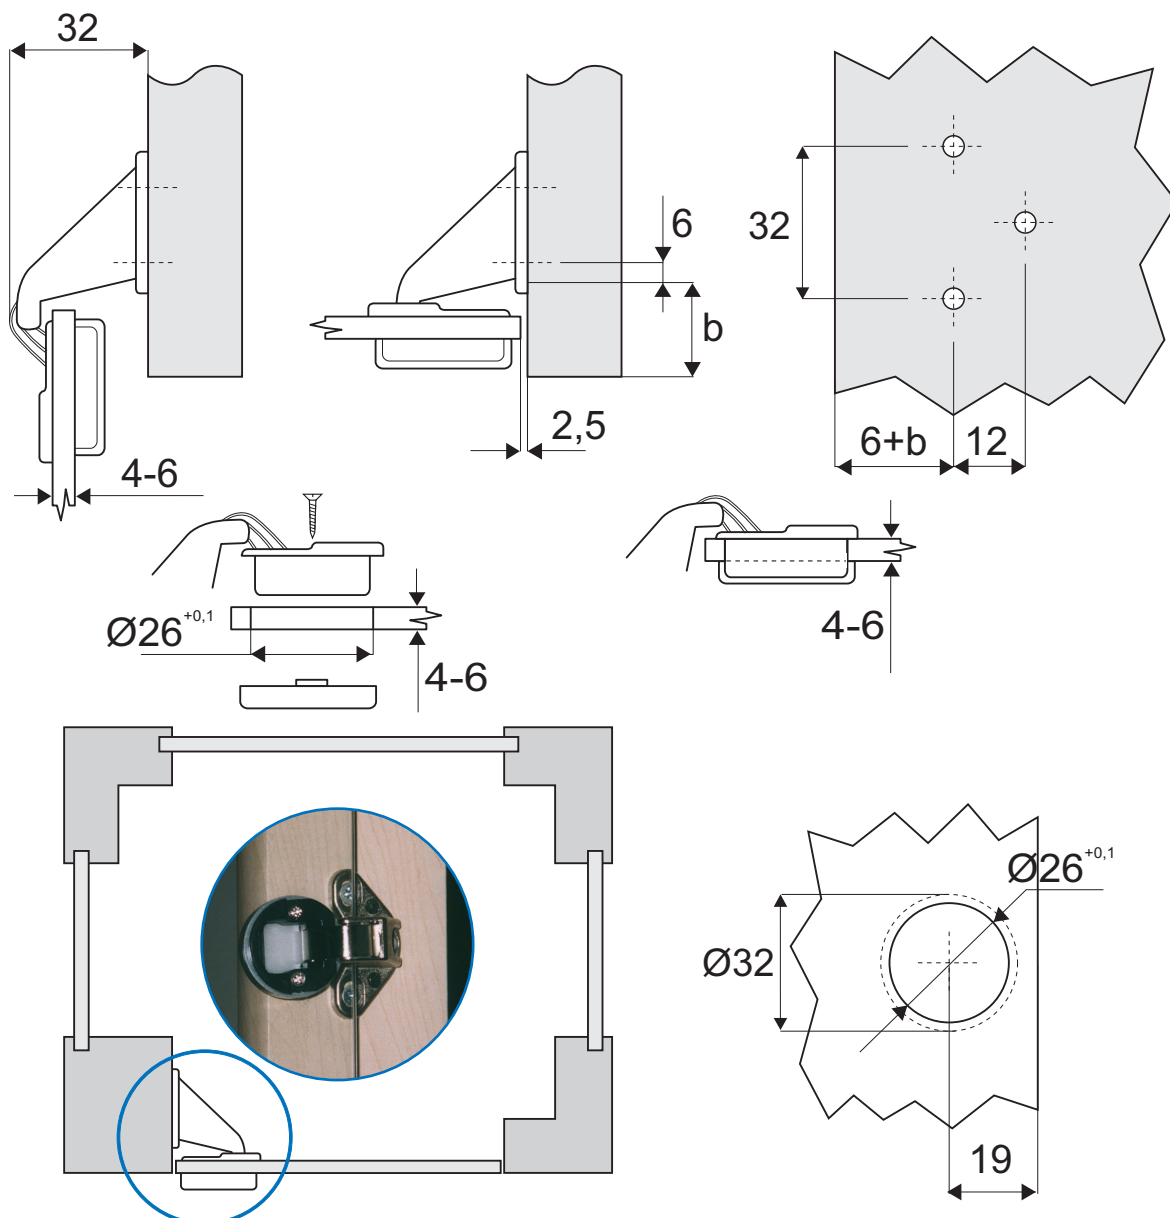

SOFT CLOSE MINI GLASS DOOR


HINGE Ø 26 MM - 95°



Standard model

**SOFT CLOSE
CLIP-ON
F/ 4-6 MM GLASS
Ø 26 MM**

Hinge w/mounting plate f/easy up & down adjustment (optional)

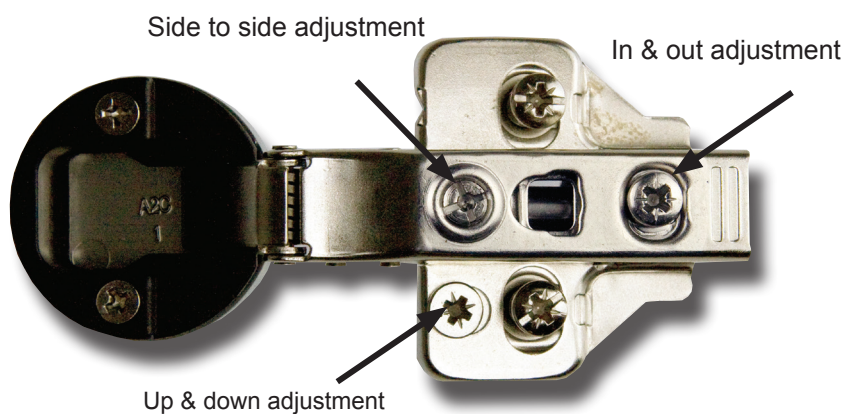


H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel


Full overlay (A)



Half overlay (B)

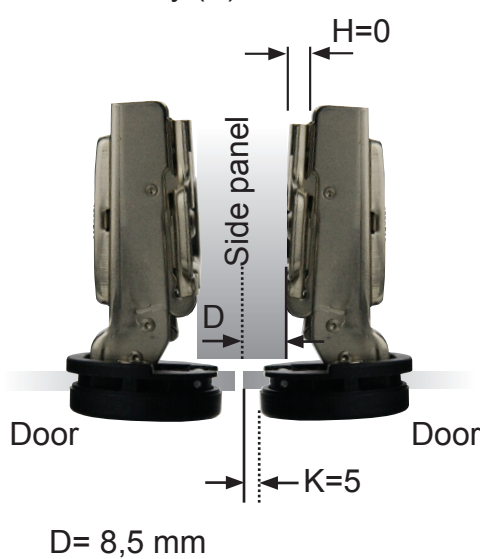

Inset (C)

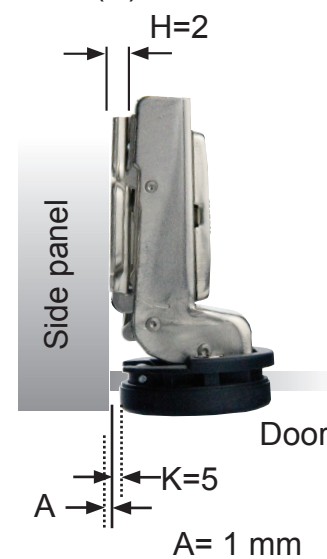

SOFT CLOSE MINI GLASS DOOR

HINGE Ø 26 MM - 95°

- high quality furniture fittings

Cup drawing



Opening angle: 95°
 Depth of hinge cup: 10,6 mm
 Diameter of hinge cup: 26 mm
 Possible drilling distances on the glass door (K): 4-7 mm
 Glass door thickness: 4-6 mm



Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																
Full overlay (A)	H=12,5+K-D	15.01.720 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th></tr><tr><th>0</th><td>15,5</td><td>16,5</td><td>17,5</td></tr><tr><th>2</th><td>13,5</td><td>14,5</td><td>15,5</td></tr><tr><th>4</th><td>11,5</td><td>12,5</td><td>13,5</td></tr></table>	D \ K	3	4	5	0	15,5	16,5	17,5	2	13,5	14,5	15,5	4	11,5	12,5	13,5	
D \ K	3	4	5																	
0	15,5	16,5	17,5																	
2	13,5	14,5	15,5																	
4	11,5	12,5	13,5																	
Half overlay (B)	H=3,5+K-D	15.01.721 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th></tr><tr><th>0</th><td>6,5</td><td>7,5</td><td>8,5</td></tr><tr><th>2</th><td>4,5</td><td>5,5</td><td>6,5</td></tr><tr><th>4</th><td>2,5</td><td>3,5</td><td>4,5</td></tr></table>	D \ K	3	4	5	0	6,5	7,5	8,5	2	4,5	5,5	6,5	4	2,5	3,5	4,5	
D \ K	3	4	5																	
0	6,5	7,5	8,5																	
2	4,5	5,5	6,5																	
4	2,5	3,5	4,5																	
Inset (C)	H=-4+K+A	15.01.722 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>A \ K</th><th>3</th><th>4</th><th>5</th></tr><tr><th>0</th><td>1</td><td>0</td><td>-1</td></tr><tr><th>2</th><td>3</td><td>2</td><td>1</td></tr></table>	A \ K	3	4	5	0	1	0	-1	2	3	2	1					
A \ K	3	4	5																	
0	1	0	-1																	
2	3	2	1																	
		H = 0 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																	
		15.03.728-0 H = 0 f/euro screws Clip-on	To be ordered separately if easy up & down adjustment is wanted. Pre-mounted euro screws included.																	
15.01.830 , ABS Chrome plated cover 15.01.831 , ABS Alu plated cover 15.01.820 , ABS Chrome plated cover 15.01.821 , ABS Alu plated cover																				


SOFT CLOSE MAXI GLASS DOOR HINGE Ø 35 MM -100°



Standard model


**SOFT CLOSE
CLIP-ON
F/ 4-6 MM GLASS
Ø 35 MM**

Hinge w/mounting plate f/easy up & down adjustment (optional)

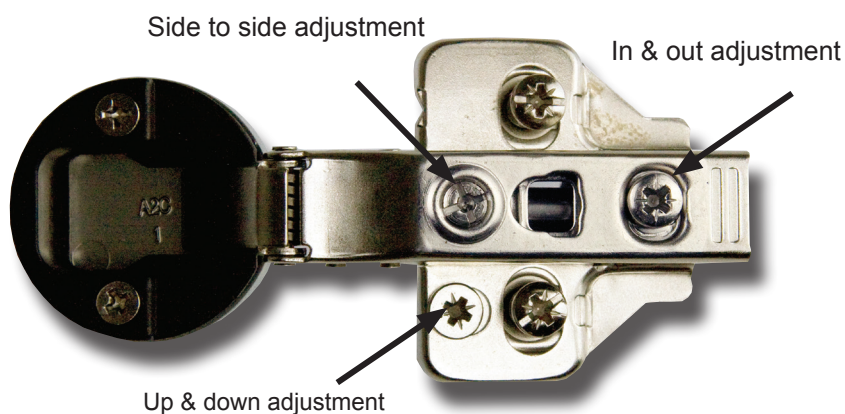


H = height of mounting plate
D = required door overlay
K = drilling distance from the edge of door to the edge of the cup hole
A = gap between door and sidepanel


Full overlay (A)

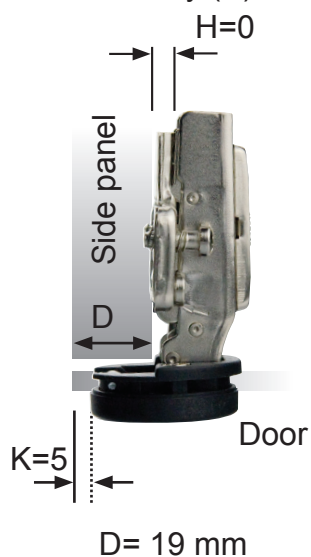

Half overlay (B)

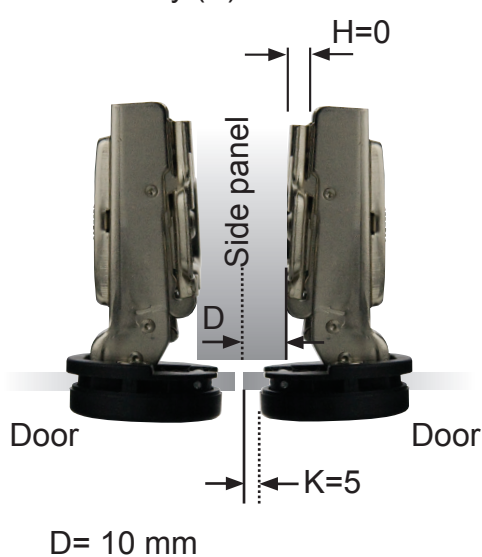

Inset (C)

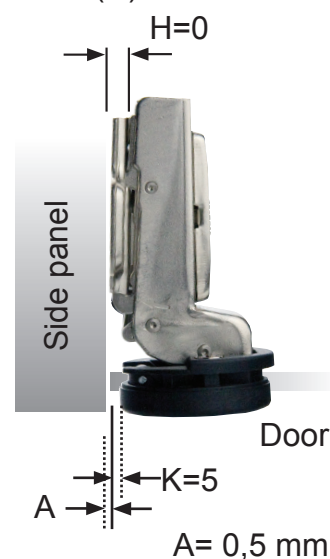

SOFT CLOSE MAXI GLASS DOOR

HINGE Ø 35 MM -100°

- high quality furniture fittings





SISO
DENMARK

Cup drawing



Opening angle: 100°
Depth of hinge cup: 11,3 mm
Diameter of hinge cup: 35 mm
Possible drilling distances on the glass door (K): 4-8 mm
Glass door thickness: 4-6 mm



Steel - Nickel Plated		Item No.	D: Overlay calculations	A: Gap calculations																												
Full overlay (A)		15.01.715 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><th>2</th><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td></tr><tr><th>4</th><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td></tr></table>	D \ K	3	4	5	6	7	0	17	18	19	20	21	2	15	16	17	18	19	4	13	14	15	16	17					
D \ K	3	4	5	6	7																											
0	17	18	19	20	21																											
2	15	16	17	18	19																											
4	13	14	15	16	17																											
Half overlay (B)		15.01.716 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>D \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td></tr><tr><th>2</th><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><th>4</th><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr></table>	D \ K	3	4	5	6	7	0	8	9	10	11	12	2	6	7	8	9	10	4	4	5	6	7	8					
D \ K	3	4	5	6	7																											
0	8	9	10	11	12																											
2	6	7	8	9	10																											
4	4	5	6	7	8																											
Inset (C)		15.01.717 Incl. SISO name plate + mounting plate H = 0	<table><tr><th>A \ K</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><th>0</th><td>1,5</td><td>0,5</td><td>0,5</td><td>-1,5</td><td>-2,5</td></tr><tr><th>2</th><td>3,5</td><td>2,5</td><td>1,5</td><td>0,5</td><td>-0,5</td></tr><tr><th>4</th><td>5,5</td><td>4,5</td><td>3,5</td><td>2,5</td><td>1,5</td></tr></table>	A \ K	3	4	5	6	7	0	1,5	0,5	0,5	-1,5	-2,5	2	3,5	2,5	1,5	0,5	-0,5	4	5,5	4,5	3,5	2,5	1,5					
A \ K	3	4	5	6	7																											
0	1,5	0,5	0,5	-1,5	-2,5																											
2	3,5	2,5	1,5	0,5	-0,5																											
4	5,5	4,5	3,5	2,5	1,5																											
		H = 0 f/chipboard screws Clip-on	Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.																													
		15.03.728-0 H = 0 f/euro screws Clip-on	To be ordered separately if easy up & down adjustment is wanted. Pre-mounted euro screws included.																													
																																
15.01.810 , ABS Chrome plated cover	15.01.811 , ABS Alu plated cover	15.01.800 , ABS Chrome plated cover	15.01.801 , ABS Alu plated cover																													

GLASS DOOR HINGES F/DRILLING





GLASS DOOR HINGE „NICE“

Function: Inset doors,
w/catch function,
height adjustable

Material: Brass, chrome plated

Glass thickness: 4-6 mm
Opening angle: 105 degree
Drilling: Ø19 mm

Item No.: # 15.06.450

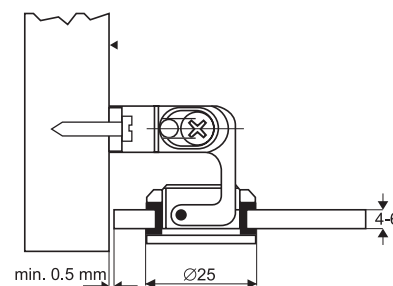






GLASS DOOR HINGE „ELEGANT“

Function: Inset doors

Material: Brass - brushed nickel

Glass thickness: 6 mm
Opening angle: 270 degree
Drilling: Ø 12 mm

Item No.: # 15.06.461

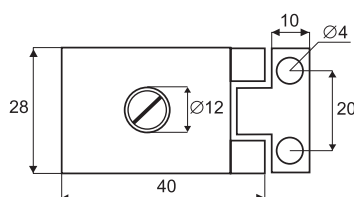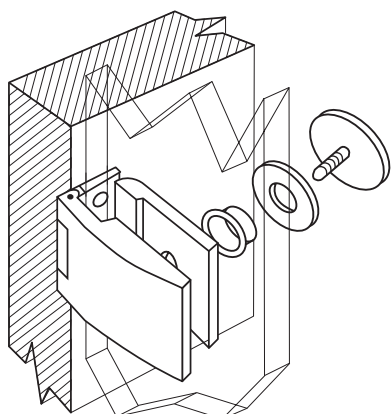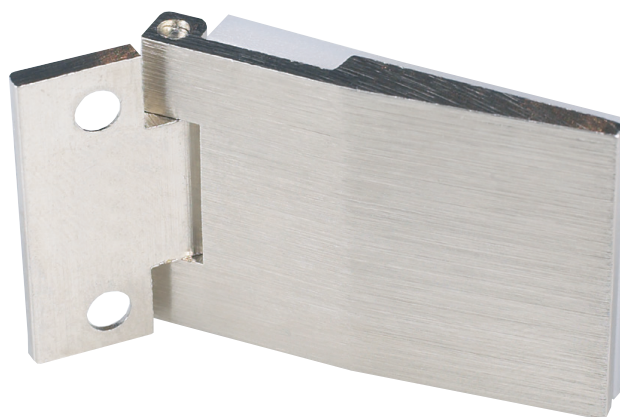

GLASS DOOR HINGES F/DRILLING

- high quality furniture fittings

SISO
DENMARK

GLASS DOOR HINGE „JONES“ F/4-8 MM GLASS

Mounting:

Glass: Ø 19,5 mm boring holes

Material:

Brass, Chrome plated

Hinge size:

52 x 31 13 mm (H/W/D)

Glass thickness: 4-8 mm

Max door weight: 15 kg per hinge

Function:





Overlay

Opening 170°

Item No.:

15.06.472

Each hinge is supplied with 3 transparent cushions 1 mm thickness

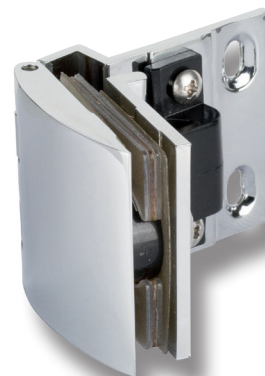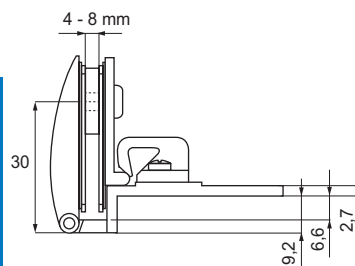

Recommended door hole min. Ø20 mm

SS-304 GLASS DOOR HINGE „GRACE“ F/5-8,76 MM GLASS

Mounting:

Glass: Ø 10 mm boring holes

Wood: 7 x 4 mm screw holes

Material:

Stainless steel 304
- polished

Hinge size:

52 x 31 13 mm (H/W/D)

Glass thickness: 5-8,76 mm

Max door size: 650 x 900 mm

Max door weight: 6 kg per hinge

Function:

Inset or half-overlay

Opening 180°










Inset:

15.06.470

Half-overlay:

15.06.471

Each hinge is supplied with 2 white cushions 1 mm thickness

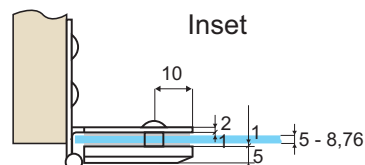

Inset




Half-overlay

GLASS DOOR HINGES F/DRILLING


MODEL „BOSCH“ F/GLASS TO GLASS

Material	3 mm brass
Hinge size:	30 x 80 mm (H/W)
Function	Inset or overlay doors
Glass thickness:	6 mm
Opening angle:	270°
Drilling:	Ø11 mm
Finish	
Chrome plated	# 15.06.500

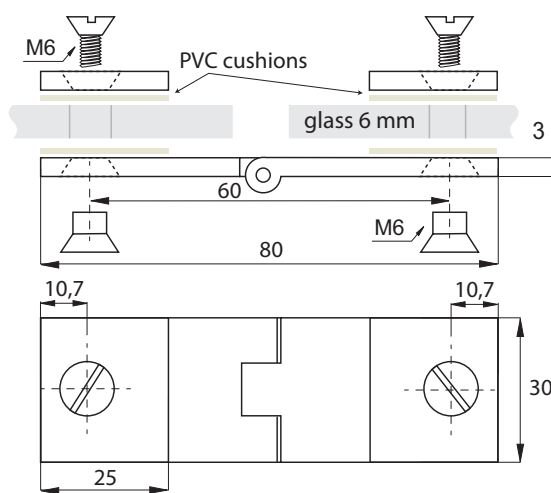

MODEL „BOSCH“ F/WALL TO GLASS

Material	Brass, Chrome plated
Size	
Hinge:	25 x 30 mm (H/W)
Mounting plate:	25 x 12 mm (H/W)
Function	Inset doors
Glass thickness:	6 - 8 mm
Drilling:	Ø11 mm
Finish	
Chrome plated	# 15.06.520

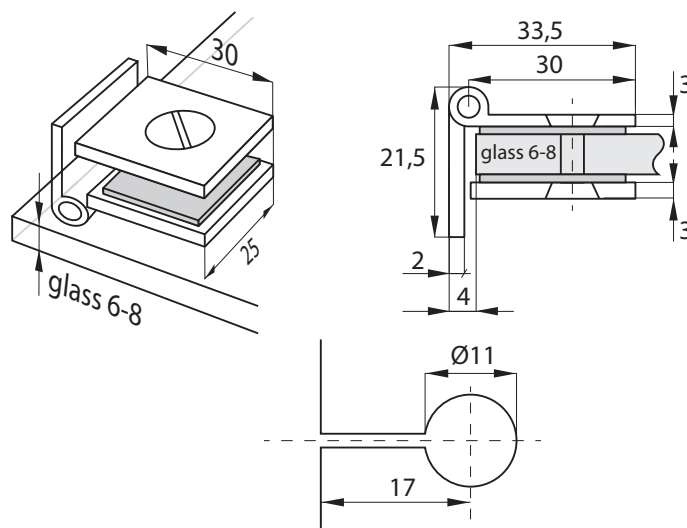

GLASS PIVOT HINGES - NO DRILLING

- high quality furniture fittings

SISO
DENMARK


GLASS DOOR HINGE 11.300

Material: Steel
 Chrome plated # 15.06.036
 Black anodized # 15.06.037
 Alu finish # 15.06.038

Mounting:
 Top + Bottom
 Inset Doors, max 4-6 mm
 Complete with nylon bushing & POM
 screws w/soft tip

Front plate:
 Size: 50 x 23 mm

Optional, to be ordered separately
BALL CATCH # 15.06.076
 Material: Brass
 Size: Ø 8 mm x 13 mm

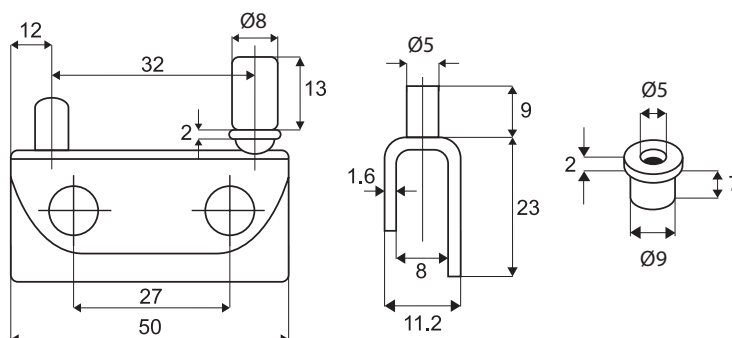


GLASS DOOR HINGE 11.561

Material: Steel
 Chrome plated # 15.06.096
 Black anodized # 15.06.095
 Alu finish # 15.06.098

Mounting:
 Top + Bottom
 Inset Doors, max 5 mm
 Complete with nylon bushings, steel
 screws

Front plate:
 Size: 40 x 14,5 mm

Optional, to be ordered separately
BALL CATCH # 15.06.076
 Material: Brass
 Size: Ø 8 mm x 13 mm

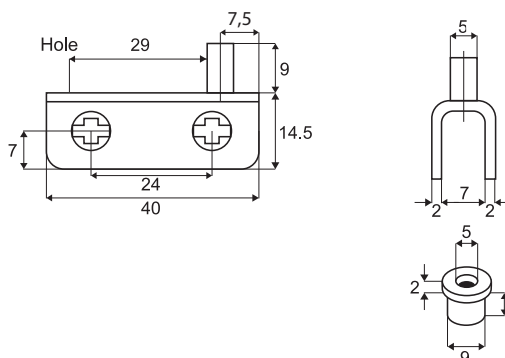

GLASS PIVOT HINGE "BRASS"

Mounting: Inset doors.
 Complete with
 brass bushings
 & softtip screws



Material: 3 mm brass

Hinge size: 42 x 27 x 16 mm
 (W/H/D)

Bushing size: Ø 8 x 11 mm

Glass thickness: 4 - 8 mm

Chrome plated # 15.06.070
 Alu finish # 15.06.071

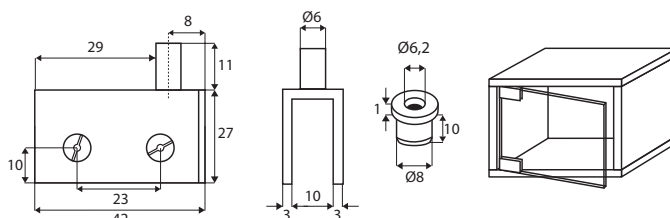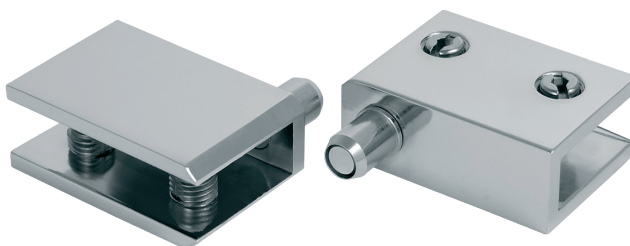

GLASS PIVOT HINGES "STAINLESS STEEL"

- NO DRILLING

MODEL "SMALL"

Mounting:

Inset doors. Complete with brass bushings & soft tip screws

Material:


2 mm stainless steel, polished

Hinge size: 42 x 20 x 13 mm
(W/H/D)

Bushing size: Ø9 x 8 mm

Glass thickness: 6 mm

Item No. # 15.06.060

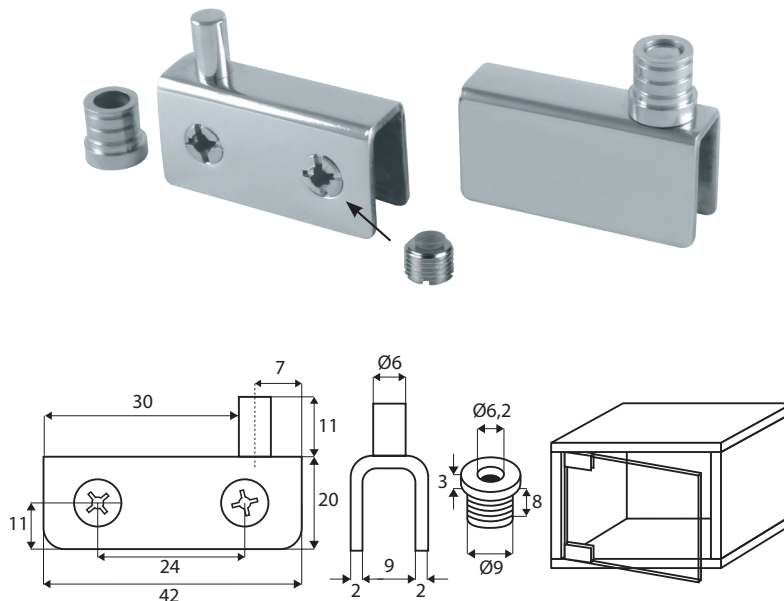

MODEL "MEDIUM"

Mounting:

Inset doors. Complete with brass bushings & soft tip screws

Material:


2 mm stainless steel, polished

Hinge size: 52 x 26 x 16 mm
(W/H/D)

Bushing size: Ø10 x 9 mm

Glass thickness: 8 mm

Item No. # 15.06.062

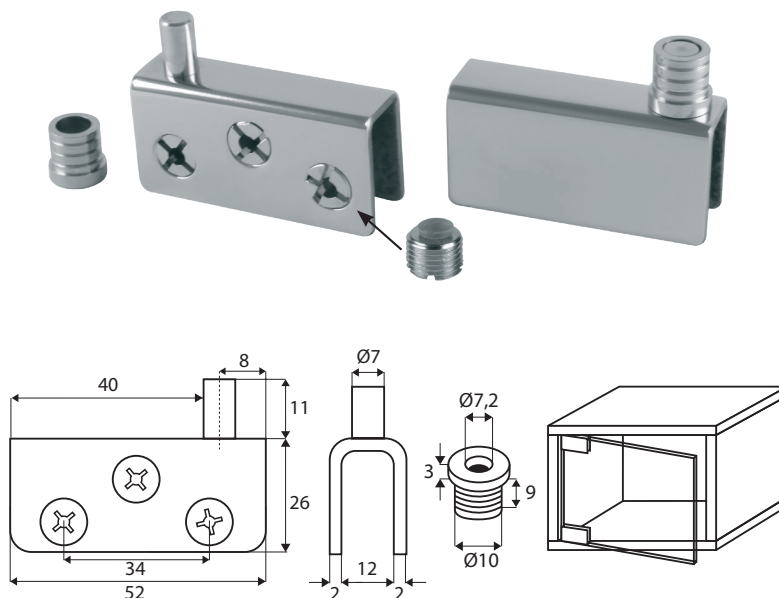

MODEL "LARGE"

Mounting:

Inset doors. Complete with brass bushings & soft tip screws

Material:


2 mm stainless steel, polished

Hinge size: 71 x 35 x 17 mm
(W/H/D)

Bushing size: Ø10 x 9 mm

Glass thickness: 10 mm

Item No. # 15.06.064

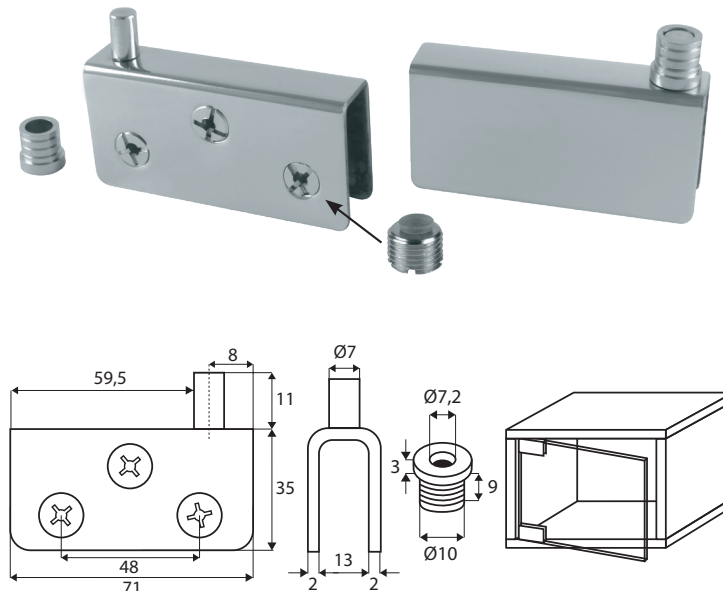

GLASS DOOR HINGE A-11 TOP & BOTTOM

Function:

For inset doors. W/catch function.
Top & Bottom. Sparkled & framed
front plate.

Mounting:

W/plastics screws & foam pad.

Material:

Zamak

Size:

25 x 25 mm

Glass thickness:

5 - 6 mm

Item No.:





Brass plated # 15.06.120

Chrome plated # 15.06.126

Black anodized # 15.06.127

Optional:

Matching handle model A-10



GLASS DOOR HINGE D-16 TOP & BOTTOM

Function:

For overlay doors. W/catch function.
Top & Bottom. Sparkled front plate.

Mounting:

W/plastics screws & foam pad.

Material:

Zamak

Size:

40 x 30 mm




Glass thickness:

5 - 6 mm

Item No.:

Brass plated # 15.06.410

Chrome plated # 15.06.415

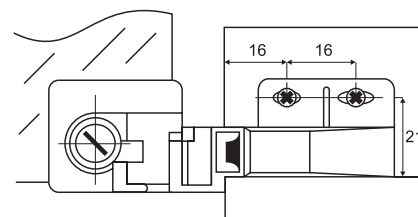

GLASS DOOR HINGES - NO DRILLING

GLASS DOOR HINGE D-13/2 TOP & BOTTOM

Function:

For inset doors. W/catch function. Top & Bottom. Sparkled front plate.

Mounting:

W/plastics screws w/soft tip & pad.

Material:

Zamak

Size:

40 x 30 mm


Glass thickness:

5 - 6 mm

Item No.:

Chrome plated # 15.06.102

Bronze plated # 15.06.103

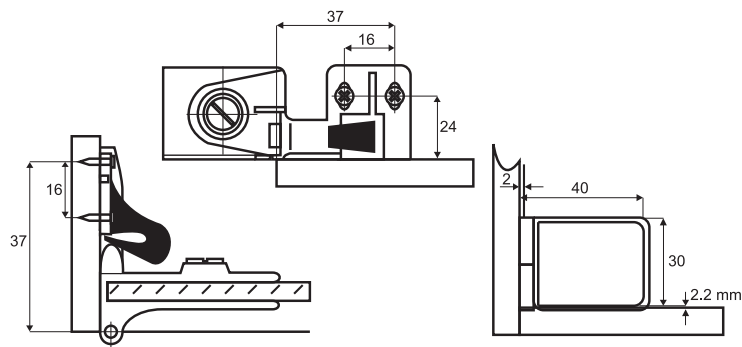

GLASS DOOR HINGE C-13 CENTRE

Function:

For inset doors. W/catch function. Centre- or top fixation if roundend doors. Sparkled front plate.

Mounting:

W/plastics screws w/soft tip & pad.

Material:

Zamak

Size:

40 x 30 mm

Glass thickness:

5 - 6 mm

Item No.:

Chrome Pl. - left hand # 15.06.311


Brass Pl. - left hand # 15.06.310

Black anodized - left hand # 15.06.313

Chrome Pl. - right hand # 15.06.321

Brass Pl. - right hand # 15.06.320

Black anodized - right hand # 15.06.323

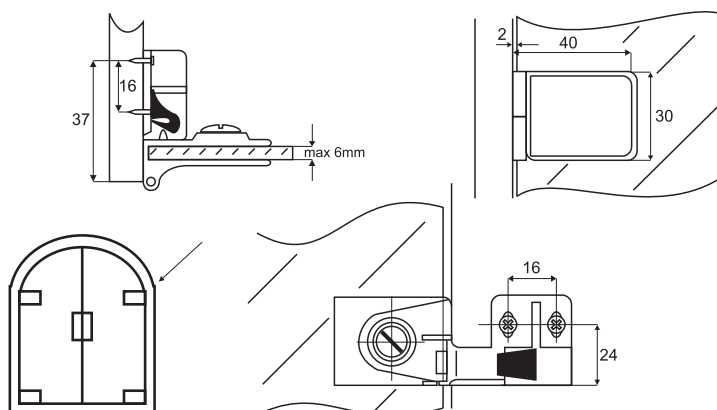

SOFT CLOSE HINGE - FOR UV-GLUE

- high quality furniture fittings

SISO
DENMARK

Features


Opening angle: 125°
F/UV-glue
Clip-On
F/3 - 6 mm glass
W/Soft close pump
Universal. Can be used for both inset, half-overlay & overlay doors

Finish


Nickel plated

Item No.


15.03.750

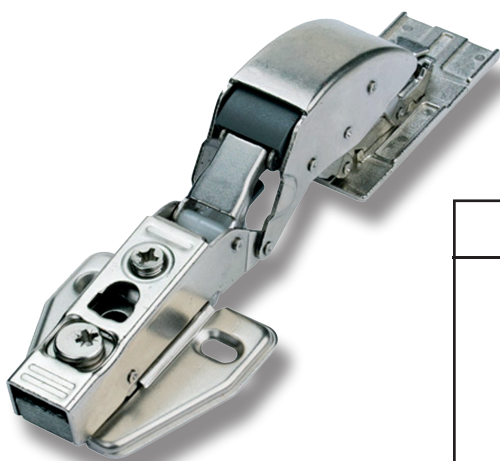

Space needed to open the door




A \ T	3	4	5	6
K				
1,5	13,6	14,4	15,2	16,1
3,0	11,2	12,1	12,9	13,8
4,5	8,9	9,8	10,7	11,6
6	6,8	7,7	8,6	9,5
7,5	4,2	5,0	5,8	6,6
8	2,8	3,8	4,8	5,8
-	-	-	-	-
16,5	0	0	0,3	0,8




L \ T	3	4	5	6
K				
1,5	0	0	0	0
3,0	0	0	0	0
3,5	0	0	0	0
-	-	-	-	-
16,5	0	0	0	0

Full overlay (A)

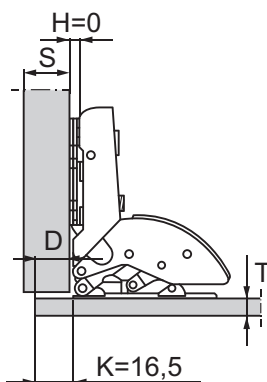


D= 14 mm

Half overlay (B)

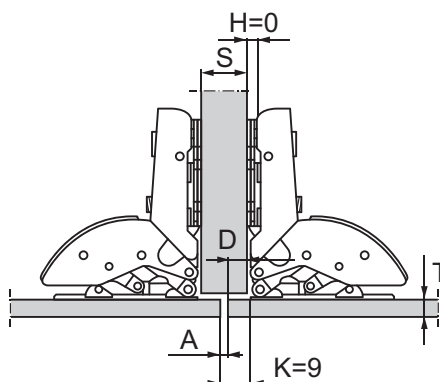

D= 6,5 mm


Inset (C)

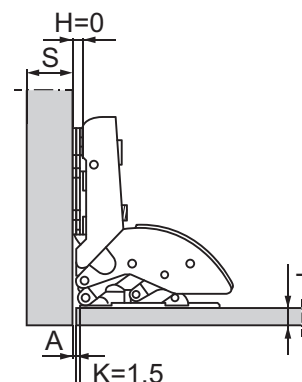


A= 2,5 mm

SOFT CLOSE HINGE - FOR UV-GLUE



Full overlay (A) - Item No.: # 15.03.750

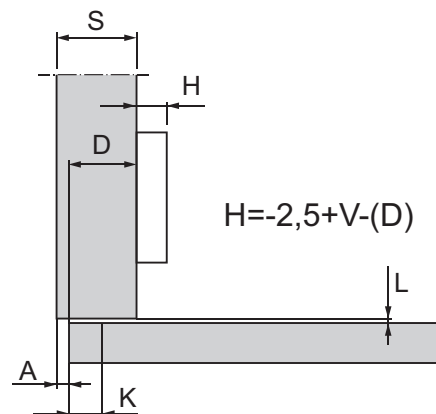

Half overlay (B) - Item No.: # 15.03.750


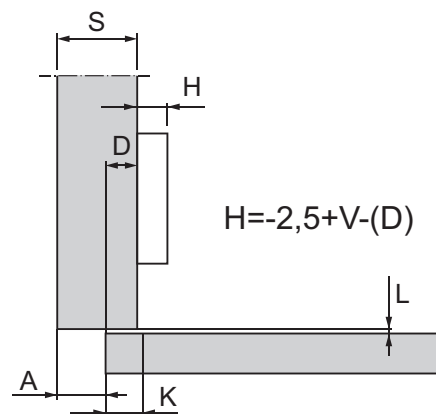


Inset (C) - Item No.: # 15.03.750

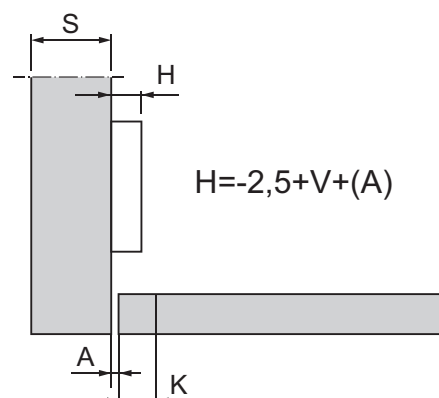

H = 0
f/chipboard
screws
Clip-on

Delivered as standard mounting plate with all hinges. Chipboard screws to be ordered separately.

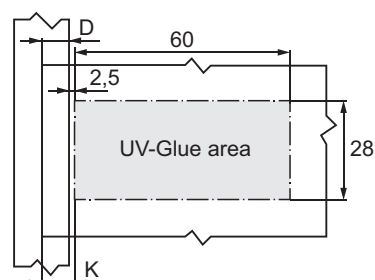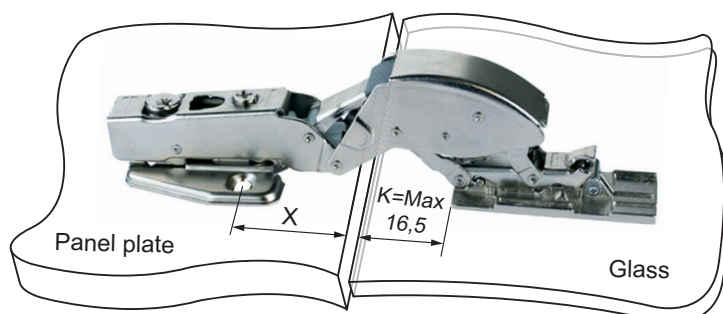

LIFT-OFF BUTT HINGE SS-304 FOR UV-GLUE

Mounting: By UV-glue B 682-0 from Bohle.
UV-lamp is needed



Material: 2,5 mm stainless steel 304 - polished

Hinge size: 65 X 50 mm (H/W)

Function: Inset doors
Max door width 500 mm
Load capacity: 7,5 KG per pair
Opening angle 270°
Glass thickness: 4-8 mm

Right hand: # 15.13.590

Left hand: # 15.13.600



BUTT HINGE SS-304 FOR UV-GLUE



Mounting: By UV-glue B 682-0 from Bohle.
UV-lamp is needed

Material: 2 mm stainless steel 304 - polished

Hinge size: 65 x 50 mm (H/W)

Function: Inset doors
Max door width 500 mm
Load capacity: 7,5 KG per pair
Opening angle 270°
Glass thickness: 4-8 mm

Item No: # 15.13.105

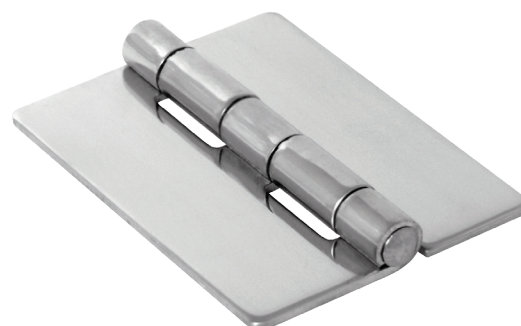

BRASS BUTT HINGE FOR UV-GLUE

Mounting: By UV-glue B 682-0 from Bohle
UV-lamp is needed

Material: 2,9 mm Brass - Chrome Plated

Hinge size: 60 x 60 mm (H/W)


Function: Inset doors
Max door width 500 mm

Load Capacity: 7,5 Kg per pair

Opening: 270°

Glass thickness: 4-8 mm

Finish: Chrome Plated (CPL) # 15.13.110
SS-Look (nickel brushed) # 15.13.111

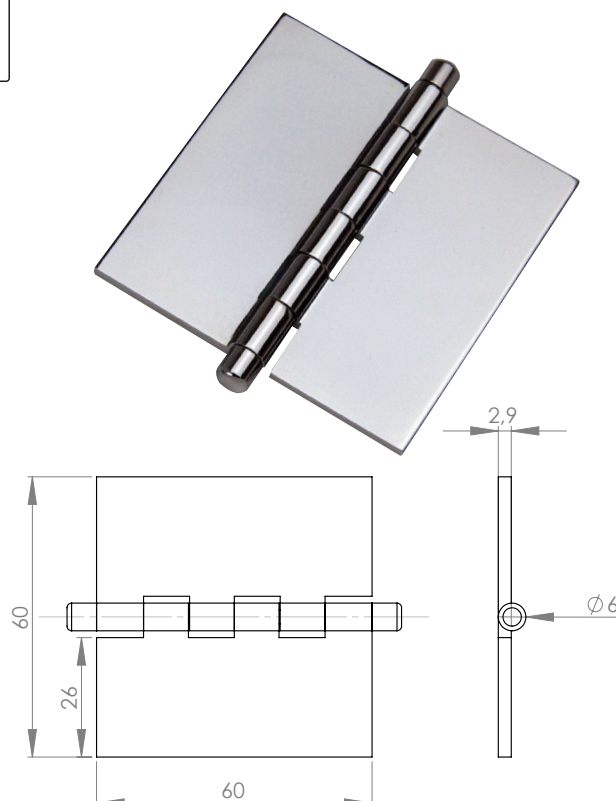

GLASS DOOR HINGE FOR UV-GLUE

PIVOT HINGE SS-304 FOR UV-GLUE

Mounting: By UV-glue B 682-0 from Bohle.
UV-lamp is needed


Material: Brushed SS-304

Function: Pivot hinge for UV-glue, max. 12 mm glass thickness, max load cap- 10 Kg.
A threaded pin in the hinge allows the door to be removed after gluing

Item No:

Pivot hinge Ø20 mm. # 15.06.015

Pivot hinge Ø30 mm. # 15.06.016

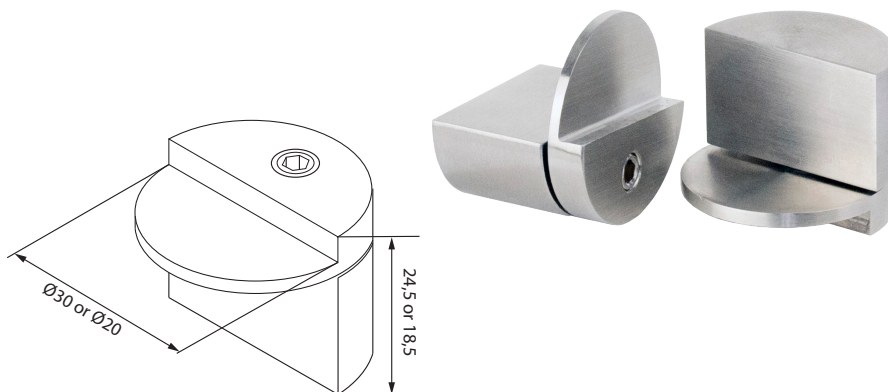

PIVOT HINGE SS-304 FOR UV-GLUE

Mounting: By UV-glue B 682-0 from Bohle.
UV-lamp is needed


Material: Brushed SS-304

Function: Pivot hinge for UV-glue, max. 10 mm glass thickness, 180 degree. max load cap. 5 Kg. pr hinge.
A threaded pin in the hinge allows the door to be removed after gluing

Item No:

Pivot hinge Ø24 mm. # 15.06.010

Pivot hinge Ø44 mm. # 15.06.011

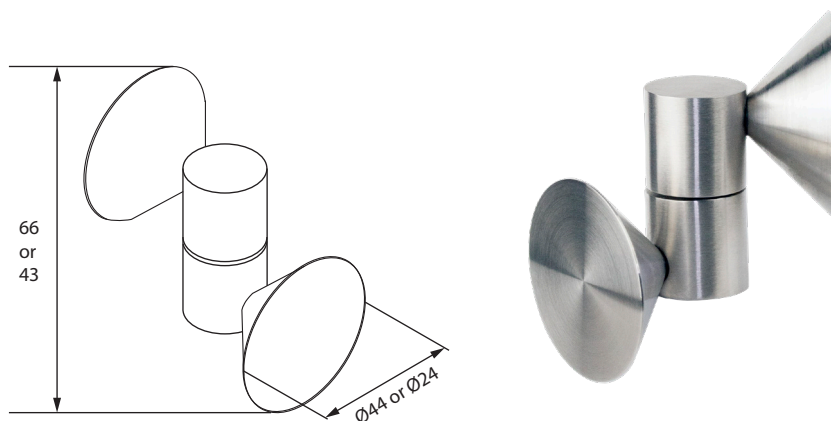

MAGNETIC CATCH FOR UV-GLUE, SS-304

Mounting: By UV-glue B 682-0 from Bohle.
UV-lamp is needed


Material: Brushed SS-304

Function: Magnetic catch for UV-glue, magnetic locking force 2 Kg.

Item No:

Magnetic catch 30x12x12 mm. # 22.01.140

Magnetic catch 11x12x12 mm. # 22.01.145

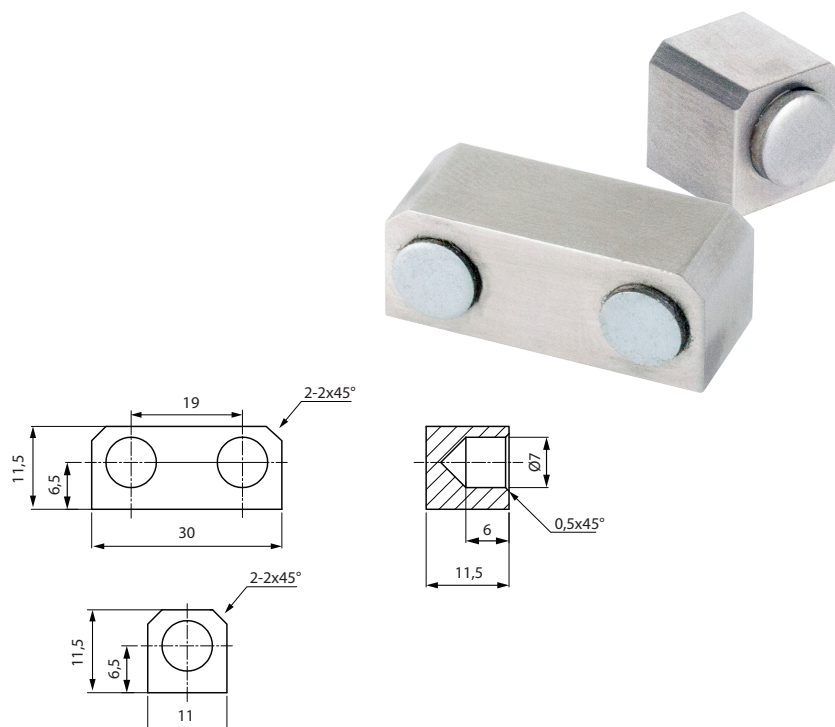

SMALL BOX HINGES

- high quality furniture fittings

QUADRANT HINGES

Material:	Steel
Finish:	Nickel Plated (NPL), Brass Plated (BPL), Bronze Plated (BRZ)
Size:	30 x 33 mm
Screw Hole:	ø 2 mm - (Incl. ø2x8mm Screws)
Item No.:	
NPL	# 30.00.000
BPL	# 30.00.001
BRZ	# 30.00.002



BUTT HINGES

Material:	Steel
Finish:	Nickel Plated (NPL), Brass Plated (BPL), Bronze Plated (BRZ)
Size:	16 x 37 mm
Screw Hole:	ø 2 mm - (Incl. ø2x8mm Screws)
Item No.:	
NPL	# 30.00.015
BPL	# 30.00.016
BRZ	# 30.00.017



MINI BRASS CYLINDER HINGES

Material:	Brass
Finish:	Nickel Plated (NPL), Brass Plated (BPL), Bronze Plated (BRZ)
Size:	Ø3,5 x 38 mm
Item No.:	
NPL	# 30.00.025
BPL	# 30.00.026
BRZ	# 30.00.027
Size:	Ø5 x 15 mm
Item No.:	
NPL	# 30.00.030
BPL	# 30.00.031
BRZ	# 30.00.032
Size:	Ø5 x 25 mm
Item No.:	
NPL	# 30.00.035
BPL	# 30.00.036
BRZ	# 30.00.037



CLASPS

Material:	Steel
Finish:	Nickel Plated (NPL), Brass Plated (BPL), Bronze Plated (BRZ)
Size:	22 x 31 mm
Screw Hole:	ø 2 mm - (Incl. ø2x8mm Screws)
Item No.:	
NPL	# 30.00.050
BPL	# 30.00.051
BRZ	# 30.00.052



BOX LOCKS

Material:	Steel
Finish:	Nickel Plated (NPL), Brass Plated (BPL), Bronze Plated (BRZ)
Size:	31 x 29 x 8 mm
Incl:	1 key, 1 Escutcheon, 2 Striking Pl. (Top & Bottom)
Item No.:	
NPL	# 30.00.055
BPL	# 30.00.056
BRZ	# 30.00.057



MAGNETS

Material:	NdFeB Magnetic
Finish:	Bright Zinck Plated (BZP)
Size:	Ø4 x 3 mm
Item No.:	# 30.00.070




TABLE HINGES






- high quality furniture fittings

SISO
DENMARK

VICI HINGE - ZAMAK w/ STEEL LINKAGE - 180°

Material: Body: Zamak
Linkage: Steel
Finish: Yellow Zinc Plated (YZP)
Size: 44 x 12,5 mm
Screw Hole: ø 4 mm - c/c 32 mm
Item No.: # 15.07.115

Other sizes and finishes on request

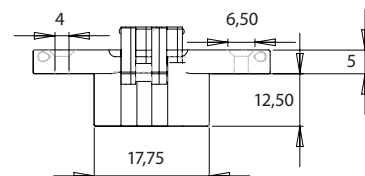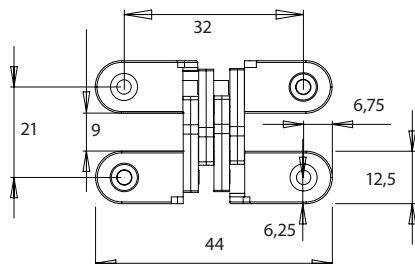

VICI HINGE - ZAMAK w/ SS LINKAGE - 180°

Material: Body: Zamak
Linkage: Stainless Steel (SS)
Finish: Body: Stainless Steel look- Brushed
Linkage: Plain

Incl. 4 CSK chip board screws

*All measurements in mm

A	B	C	D	E	F	G	H	I	J	K	Item No.
45 mm	13	20,5	31,6	8	6,7	18,8	12	5	6,6	4	15.07.120
60 mm	13	21,5	47,2	9	6,5	32	12	6	7,7	5	15.07.121
70 mm	16	26,5	54	10,5	8	34	15,5	7	8	5	15.07.122
95 mm	19	32	75	13	10	52	17	10	10	6	15.07.123
* 118 mm	27	50	89	23	14,5	65	28	12	11,5	6,5	15.07.124
* 139 mm	34,5	44,8/79,6	104/ 114	27,5	17,5/ 12,55	75	37	12	11,5	6,5	15.07.125

* For heavy duty doors






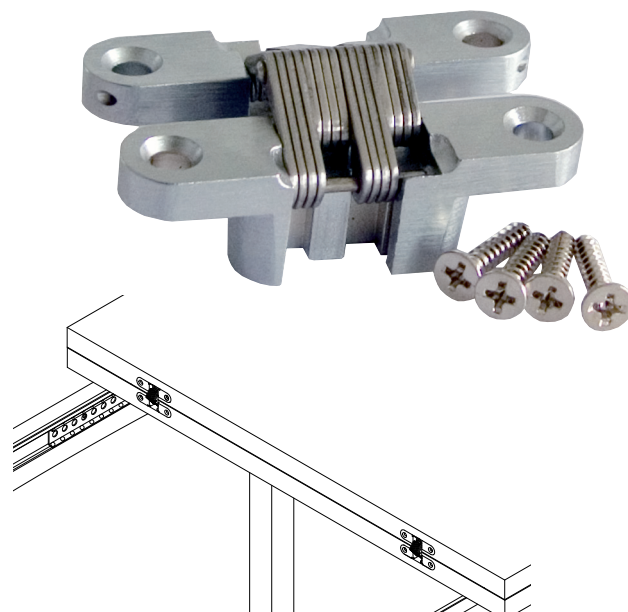


TABLE HINGES

ELU TABLE HINGE 180°

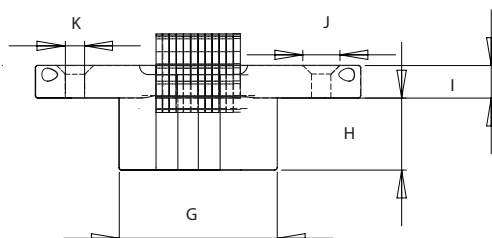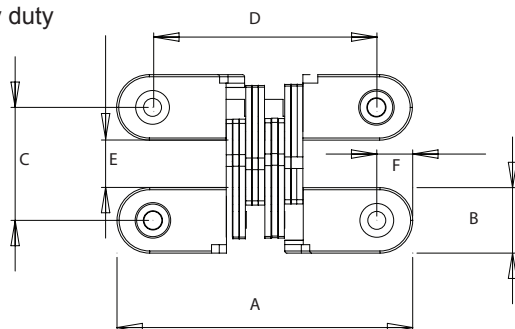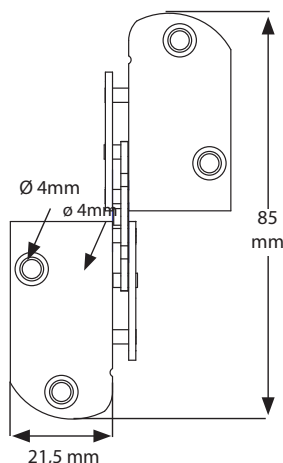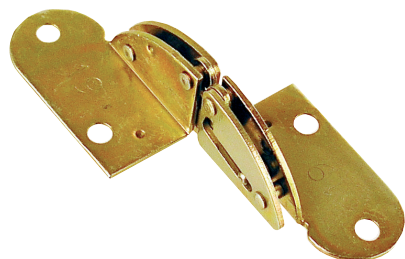

Material: Steel, Yellow Zinc Plated (YZP)
Over all Size: 85 mm x 46 mm




Panel Size X	Item No.	Panel Size X	Item No.
16 mm	# 15.80.110	23 mm	# 15.80.145
18 mm	# 15.80.120	25 mm	# 15.80.155
19 mm	# 15.80.125	30 mm	# 15.80.170
20 mm	# 15.80.130	32 mm	# 15.80.025 (BPL)
22 mm	# 15.80.140		

Spacer For Panel Thickness Reduction = SFPTR*


SFPTR*	Item No.	SFPTR*	Item No.
1 mm	# 15.80.000	2 mm	# 15.80.001

The Spacer gives you the possibility to operate with only one hinge size even though you use different panel thicknesses in your production.

Example: Take a Hinge for 18 mm panel thicknesses and add a 2 mm spacer. Now you can use the hinge for 16 mm panel thickness.

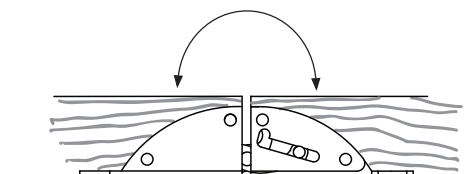

SEPA HINGE 180°

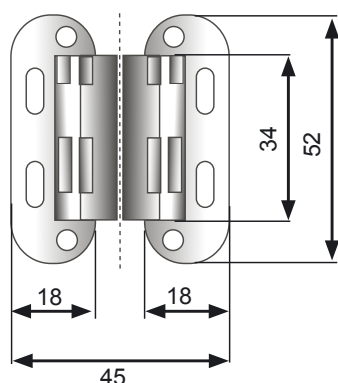

Material: Zamak
Panel thickness: Min. 26 mm
Size: 52 x 18 x 2 mm
Item No. # 15.04.076





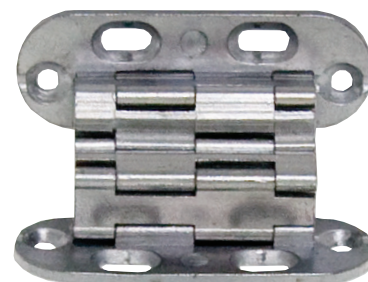


Table leaves




TABLE FLAP HINGE

- f/ 22 mm PANEL - 180°

Material:

Body: Nylon

Linkage: Zamak

Bore Size: $\varnothing$ 35 mm and $\varnothing$ 25 mm

Hole Depth: 19 mm

Finish

Body:	Linkage:	Item No.
Beige	Yellow Zinc	# 15.80.200
Black	Black Zinc	# 15.80.201

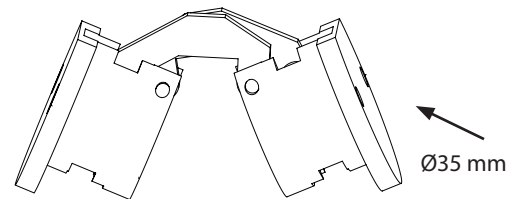
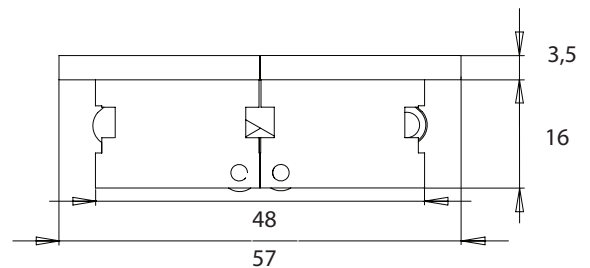
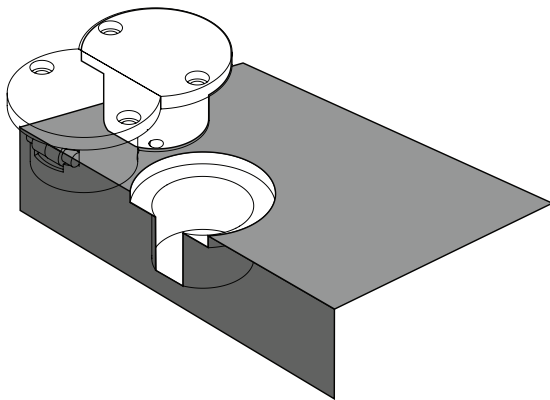
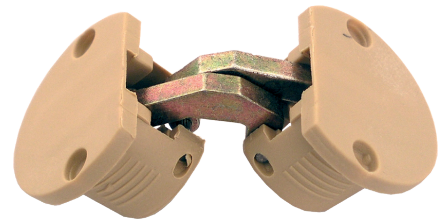



TABLE FLAP HINGE "ZAMAK"

Material: Body: Zamak, Yellow Zinc Plated
Linkage: Steel, Yellow Zinc Plated

Over all size: 108 x 40 x 3 mm

Panel size: 20 mm # 15.80.175

Panel size: 27 mm # 15.80.180

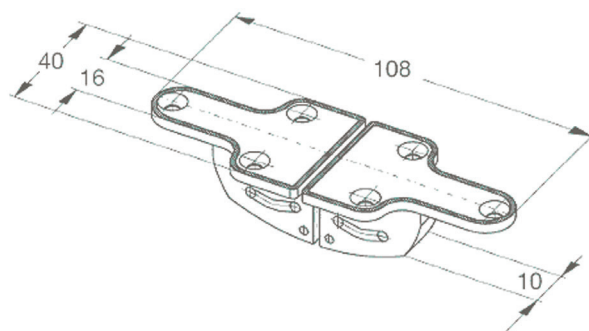




TABLE HINGES

PIANO HINGE



Material: Steel
Screw hole: $\varnothing$ 4 mm - c/c 60 mm

Size	Finish	Item No.
32 x 0,7 x 1830 mm	Brass Plated Lacquered	# 15.12.076
32 x 0,7 x 1830 mm	Nickel Plated	# 15.12.075





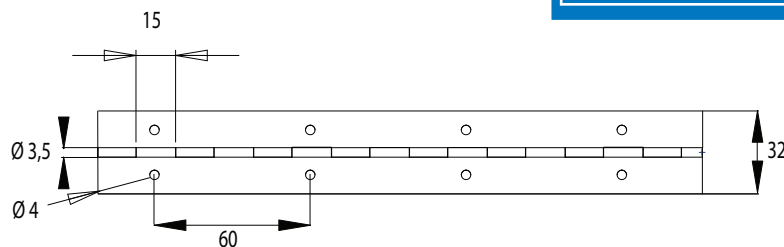


VICI HINGE - STEEL 180°

Material: Steel
Size: 65 x 13 mm
Screw hole: $\varnothing$ 4 mm - c/c 52 mm

Finish	Item No.
Brass Plated	# 15.07.010


Other Sizes on request

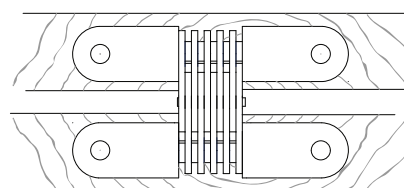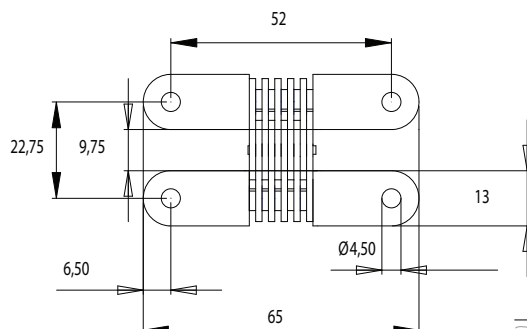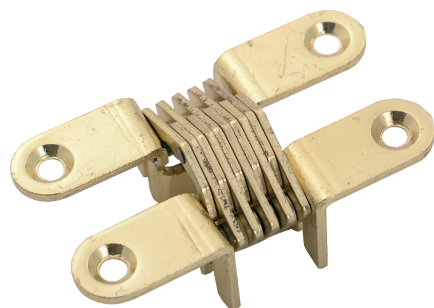

SEWING MACHINE TABLE HINGE

Material: Brass
Screw Holes: $\varnothing$ 4.0 mm

Sizes	Finish	Item. No
30 x 72 x 2.0 mm	Brass Sanded	# 15.11.350
30 x 72 x 2.0 mm	SS-Look	# 15.11.355
30 x 72 x 2.0 mm	Bronzed	# 15.11.370
30 x 80 x 2.0 mm	Brass Sanded	# 15.11.310



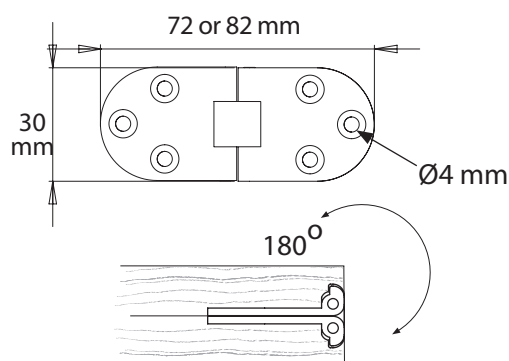


BRASS CYLINDER HINGE w/ SS PIN & SCREWS

Material: Brass
Body and Linkage: Stainless Steel (SS)
Pin and Screws: Stainless Steel (SS)
Finish: Brass Natural

Sizes	Item No	A*	B*
Ø 10 mm	# 15.07.345	11,0 mm	2,0 mm
Ø 12 mm	# 15.07.346	13,5 mm	2,2 mm
Ø 14 mm	# 15.07.347	15,5 mm	3,0 mm
Ø 16 mm	# 15.07.348	16,5 mm	3,0 mm
Ø 18 mm	# 15.07.349	17,5 mm	3,0 mm
Ø 24 mm	# 15.07.350	25,0 mm	4,5 mm

* See illustration A and B for measurement

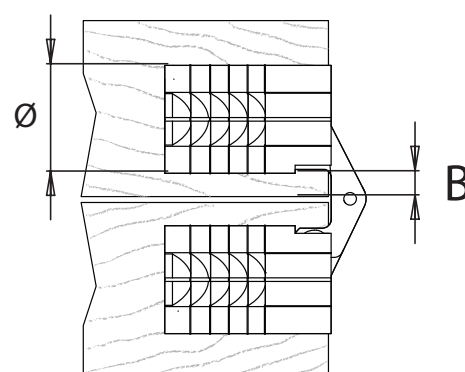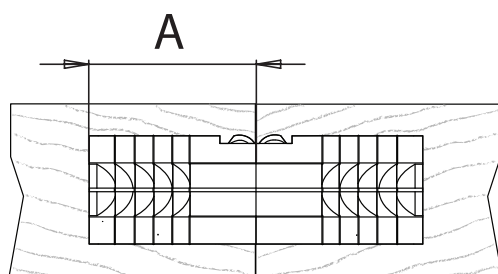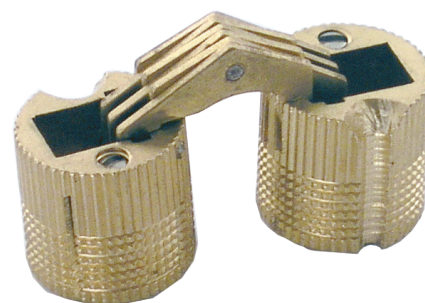




BUTLER'S TRAY HINGE SQUARE W/STEEL SPRING

Material: Brass

Screw holes: Ø3,25


Type:	Size	Finish	Item No.
Square	38 x 64 x 3 mm	Sanded	# 15.11.160
Square	38 x 64 x 3 mm	Polished	# 15.11.161

Butler's Tray hinge,
Square, Polished Brass

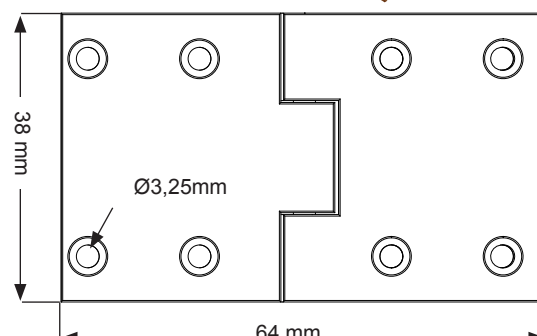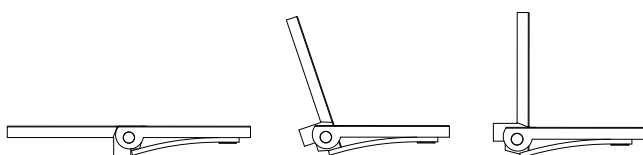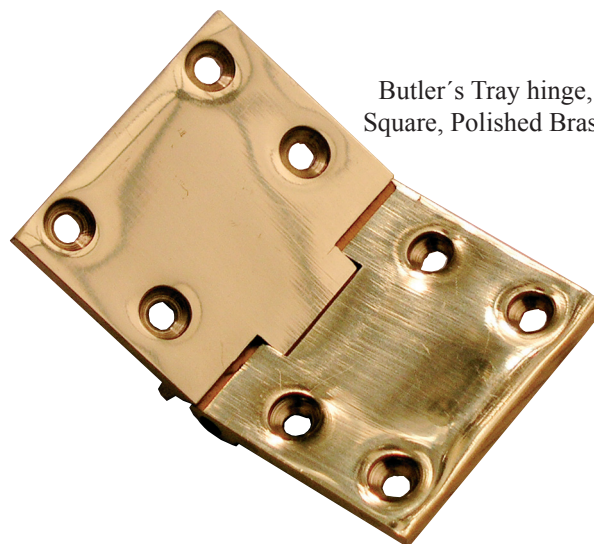

CARAVAN HINGES


MIGNON HINGE 90° Spring loaded

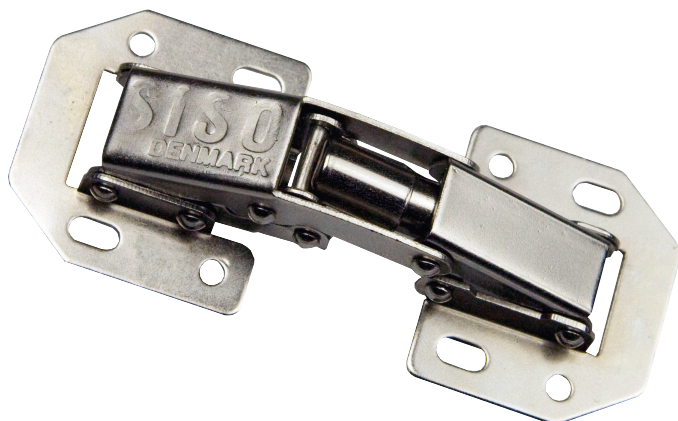

Material: Steel 1,5 mm or SS 304
Finish: Nickel Plated (NPL)
Bright Zinc Plated (BZP)

Panel thickness: Max. 20 mm

Item No.	Steel NPL	# 15.05.061
	Steel BZP (extra strong spring)	# 15.05.051
	SS 304	# 15.05.065

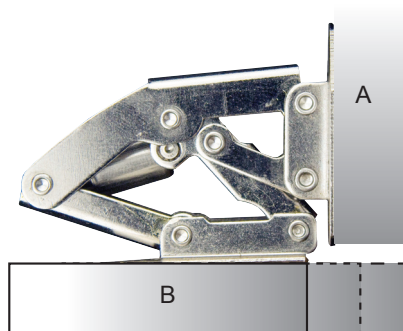


Full overlay - Half overlay - Inset doors

SPRING LOADED CARAVAN HINGE


Material: Steel 1,5 mm
Finish: Nickel Plated (NPL)

Panel thickness: Max. 19 mm

Item No. # 15.05.120

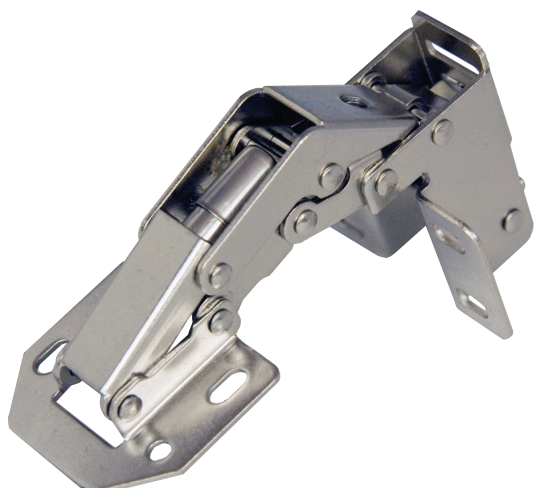

Open position

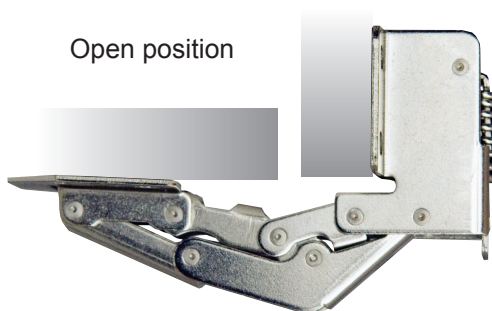


Closed position




DOOR HINGES SS-304 (HEAVY DUTY)

- high quality furniture fittings

SISO
DENMARK

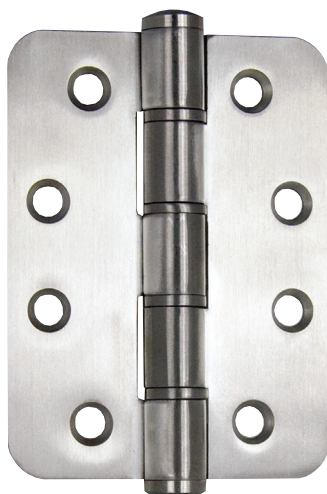


BUTT HINGE "ROUND"

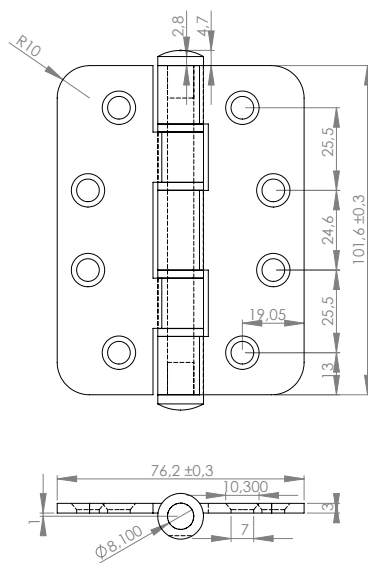


MODEL "ROUND"

Material: Stainless Steel 304
Size: 102 x 76 x 3 mm
Screw hole: Ø7 mm
w/4 ss-washers

Item No. # 15.20.116

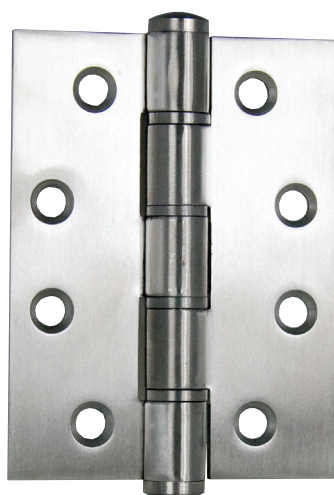


BUTT HINGE "SQUARE"

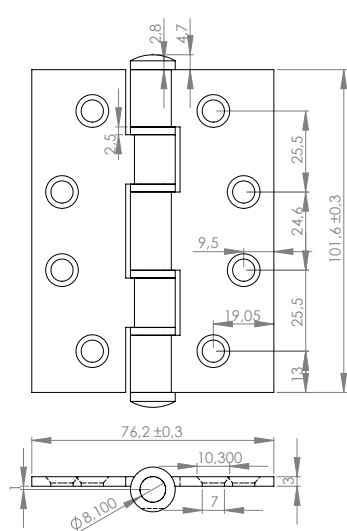


MODEL "SQUARE"

Material: Stainless Steel 304
Size: 102 x 76 x 3 mm
Screw hole: Ø7 mm
w/4 ss-washers

Item No. # 15.20.115

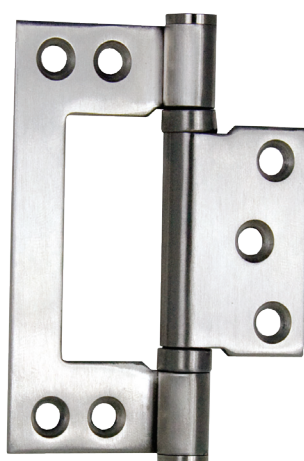

BUTT HINGE "FLUSH"

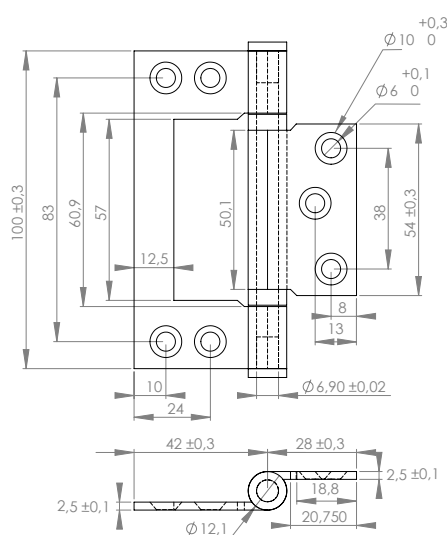


MODEL "FLUSH"

Material: Stainless Steel 304
Size: 100 x 70 x 2,5 mm
Screw hole: Ø7 mm
w/2 ss-ball bearing washers

Item No. # 15.20.100

DOOR HINGES SS-304 (HEAVY DUTY)



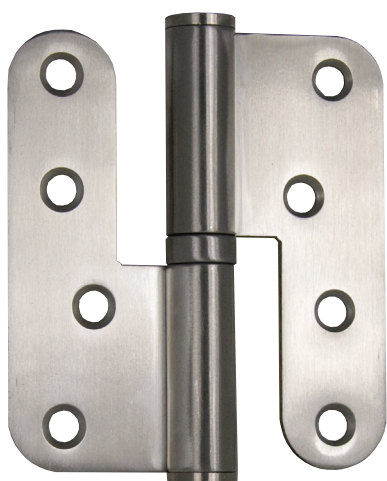


BUTT HINGE "LIFT OFF" RIGHT

MODEL "LIFT-OFF RIGHT"

Material: Stainless Steel 304
Size: 100 x 88 x 3 mm
Screw hole: Ø7 mm
w/1 ss-ball bearing washers

Item No. # 15.20.106

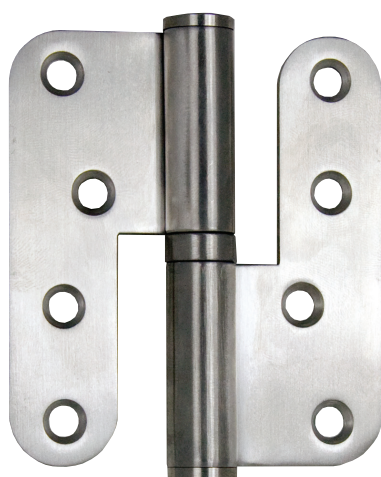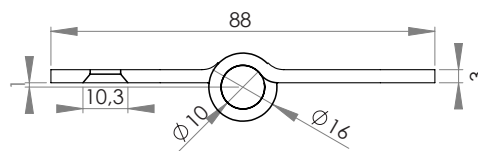
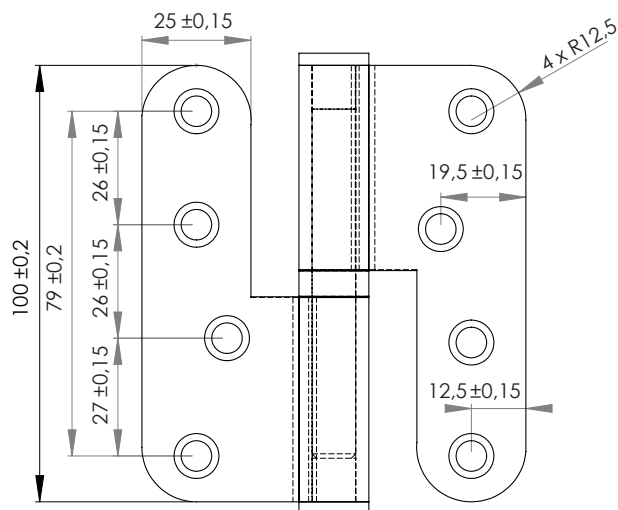


BUTT HINGE "LIFT OFF" LEFT

MODEL "LIFT-OFF LEFT"

Material: Stainless Steel 304
Size: 100 x 88 x 3 mm
Screw hole: Ø7 mm
w/1 ss-ball bearing washers


Item No. # 15.20.105

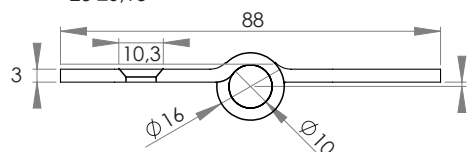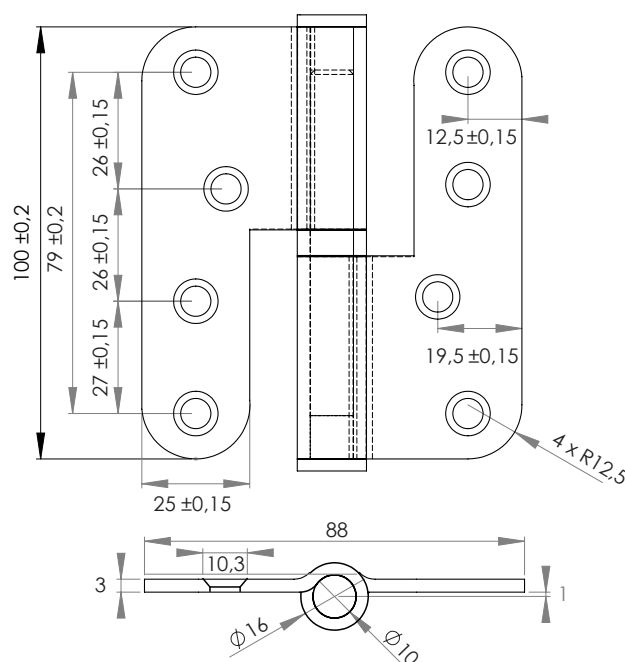

PIN DOOR HINGE (HEAVY DUTY)


- high quality furniture fittings

SISO
DENMARK


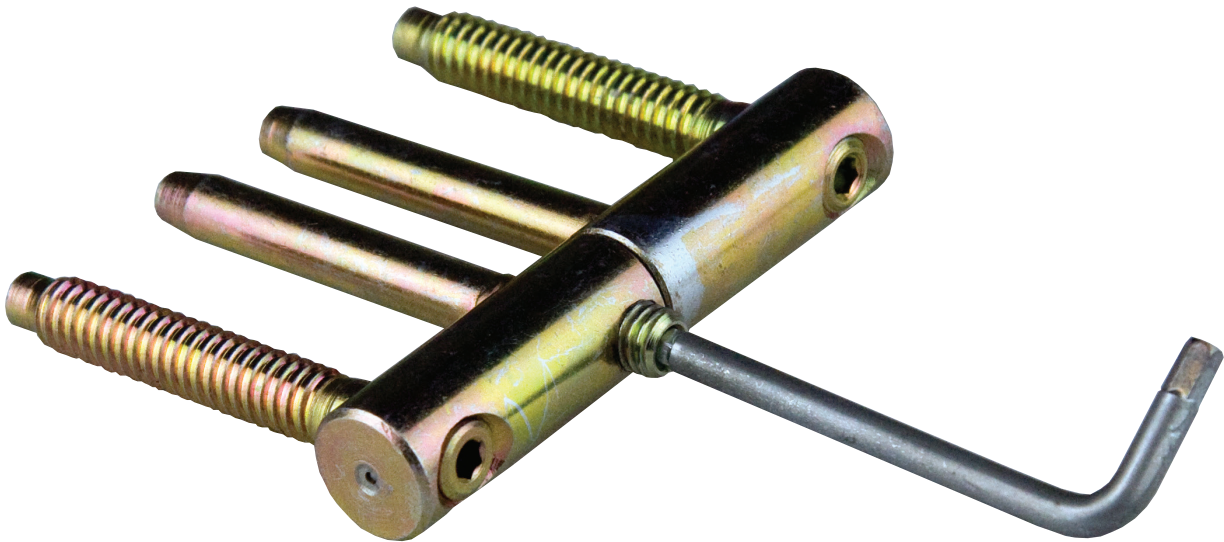


Hex key to be ordered separately


Application:	For heavy duty doors w/height adjustment function.
Size:	Ø16 x 82,5 mm (25-16-25 mm)
Material:	Steel
Finish:	Yellow Zinc Plated (YZP)
Item No.	# 15.08.000






2 mm height adjustment

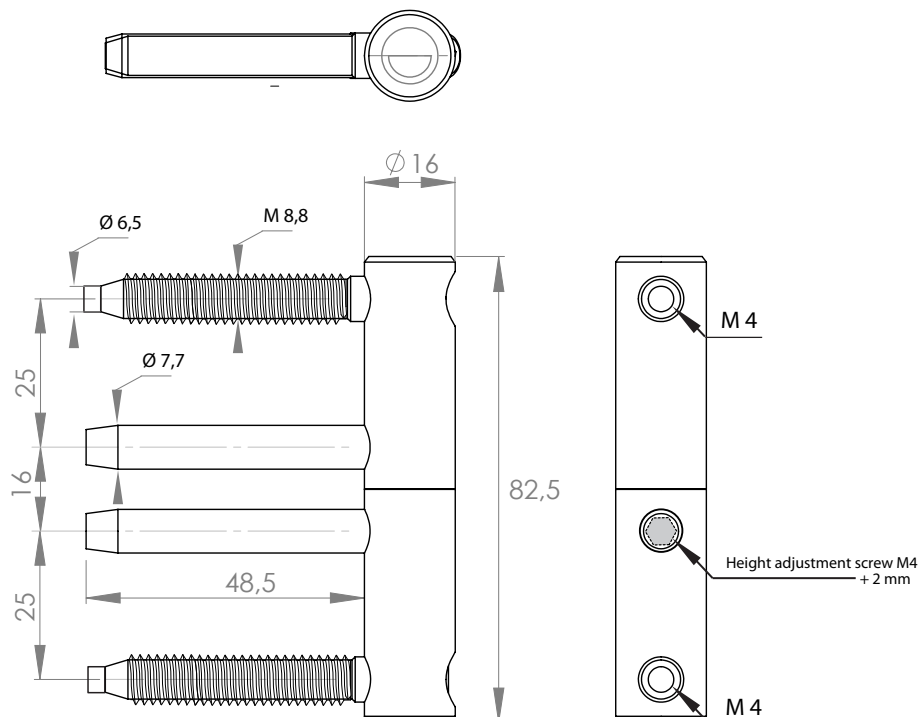

PIN DOOR HINGE (HEAVY DUTY)

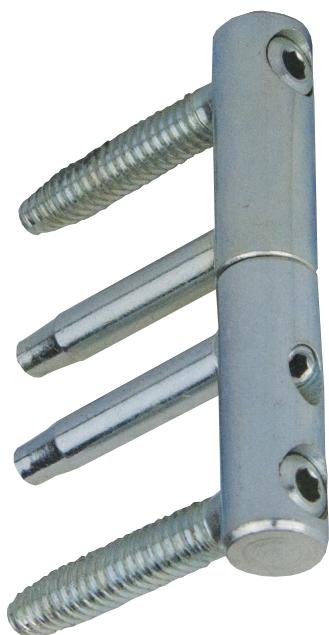


Application:	For heavy duty doors w/height adjustment function.	
Material:	Steel	
Size:	Ø14 x 82 mm (25-18-25 mm)	
Finish:	Bright Zinc Plated (BZP)	# 15.07.951
Size:	Ø16 x 82 mm (25-18-25 mm)	
Finish:	Yellow Zinc Plated (YZP)	# 15.08.005
	Bright Zinc Plated (BZP)	# 15.08.006

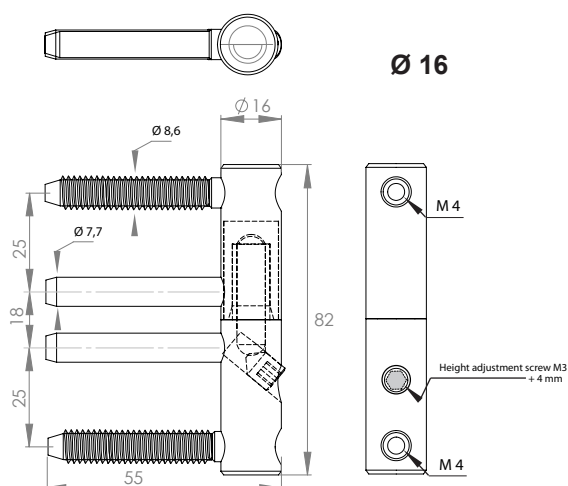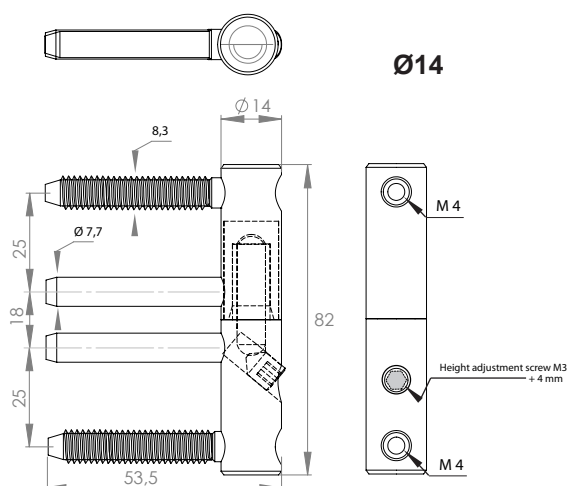

ALUMINIUM COVER CAP & DRILLING JIG

Application:	Cover for pin door hinge	
Material:	Aluminium	
Size:	Ø14 x 46,5 mm	
Finish:	Chrome Plated (CPL)	# 15.07.955
Size:	Ø16 x 46,5 mm	
Finish:	Chrome Plated (CPL)	# 15.08.010
Drilling Jig:	# 15.07.970	

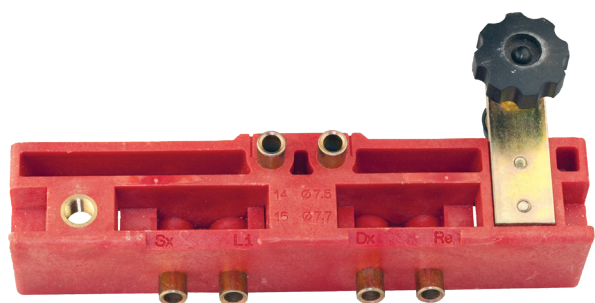

Drilling Jig 15.07.970

VICI DOOR HINGE (HEAVY DUTY)

- high quality furniture fittings

SISO
DENMARK

3-D ADJUSTMENT

Application: For heavy duty doors w/3-D adjustment function.

Door thickness: Min. 30 mm (15.08.100 & 15.08.105)
Min. 40 mm (15.08.110 & 15.08.115)

Opening: 180 degree

Max. door size: W:1000 x H:2700 mm (max. 60 kg. 3 hinges)

Material: Zamak

Size: 95 x 23,3 x 29,6 mm (L/W/D)


Finish: Aluminium finish, left hand # 15.08.100
Aluminium finish, right hand # 15.08.105

Size: 111,5 x 29 x 36 mm (L/W/D)


Finish: Aluminium finish, left hand # 15.08.110
Aluminium finish, right hand # 15.08.115




Size: 111,5 x 29 x 36 mm

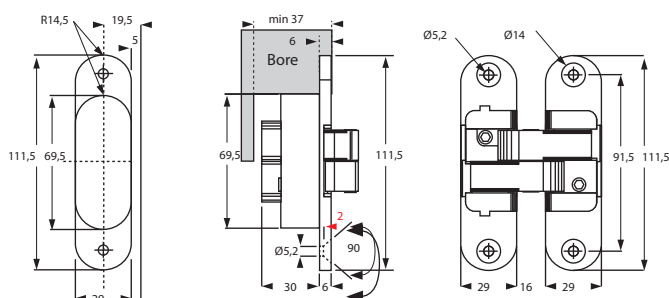

Size: 95 x 23,3 x 29,6 mm

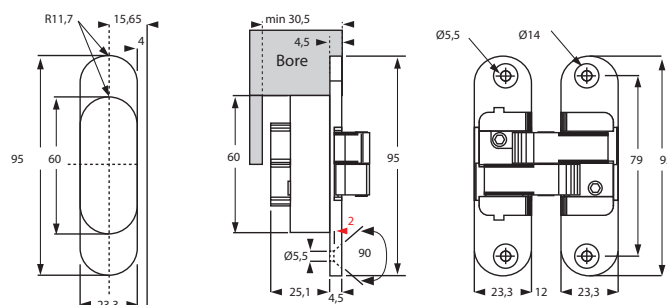


Size: 111,5 x 29 x 36 mm

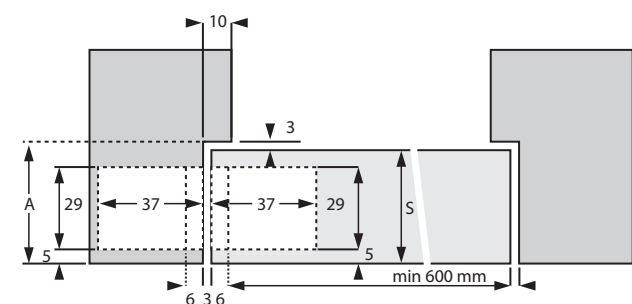

Size A is calculated using door thickness +3 mm+gasket thickness. S = min. 40 mm

Size: 95 x 23,3 x 29,6 mm

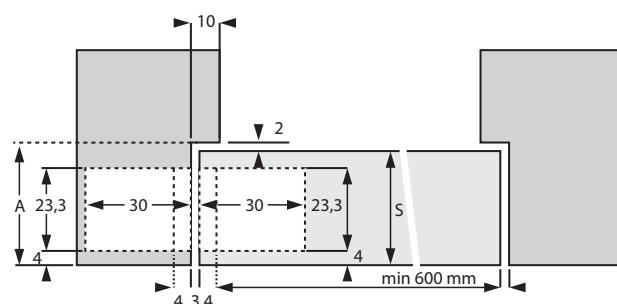


Size A is calculated using door thickness +2 mm+gasket thickness. S = min. 30 mm



Right hand model



Left hand model

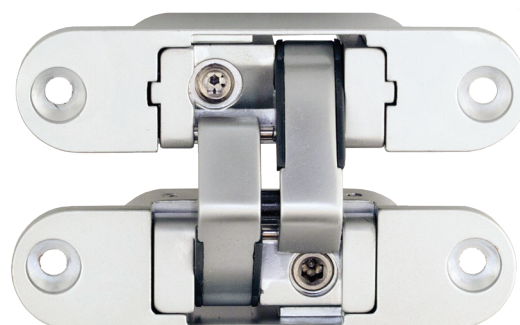



- high quality furniture fittings

SISO A/S

Mileparken 11 Phone: (+45) 45 830 900
DK - 2740 Skovlunde (Copenhagen) Fax: (+45) 45 830 444
Denmark E-mail: siso@siso.dk Web: www.siso.dk